



Jib cranes


T-Davit

Swivel T-DAVIT


An extensive range of davits offering up to WLL 500kg with 360° rotation under finger tip control for those difficult locations, giving a wide range of standard height and radius options and available customisation.

Particularly suited to situations with environment constraints (headroom, handrails etc.) with a wide range of configurations available. Designed to comply with manual handling regulations and to avoid assembling the davit at height.

Note: TYPE W provides Winch & Shackle lifting points. TYPE S provides Shackle lifting only.

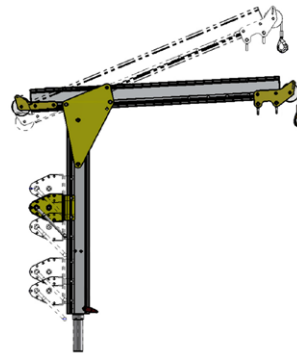

Standard Type W
(Winch and Shackle) T-DAVIT

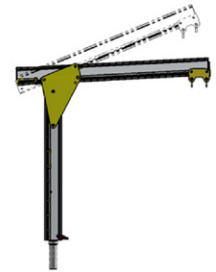


Standard Type S
(Shackle only) T-DAVIT


Information:

- GOODS WLL Up to 500kg (see table on next page)
- PERSONNEL WLL Configurations available up to 150kg
- 1 PERSON FALL ARREST EN795:2012 certified as part of an EN363 compliant system
- ATEX Suitable for use in ATEX Zone 2 explosive atmospheres
- LIGHTWEIGHT & PORTABLE
 - Manual handling compliant
 - Reduced maintenance costs
 - Bagged for easy transportation and storage
- RAPID ASSEMBLY Assembly & operation by 1 person, no tools required - just 2 main components
- RADIUS ADJUSTMENT Operational radius up to 3000mm - subject to WLL reduction (1900mm maximum for EN795)
- EASE OF ROTATION 360° rotation under full load with fingertip control
- CORROSION RESISTANT Clean anodised finish to increase wear resistance
- UNIVERSAL KINGPIN Mates with all 65mm REID sockets (or sleeves for existing sockets). Also suitable for use with socket extensions
- SPECIFICATIONS
 - 2 lifting positions as standard (A&B)
 - Twin shackles for index lifting and/or attachments for winching

Options & Upgrades:



- Integrated wheel carrier for reduced manual handling



- Beam radius adjustment
- Fall arrest (EN795:2012) and personnel winching

Custom Variations Available:



TYPE VS

Sliding beam T-DAVIT with Variable radius Shackles



TYPE VW

Variable Winched sliding beam T-DAVIT with shackles & ergonomically positioned winch (upper or lower)




TYPE T

Geared Trolley T-DAVIT





Type W Dimensions

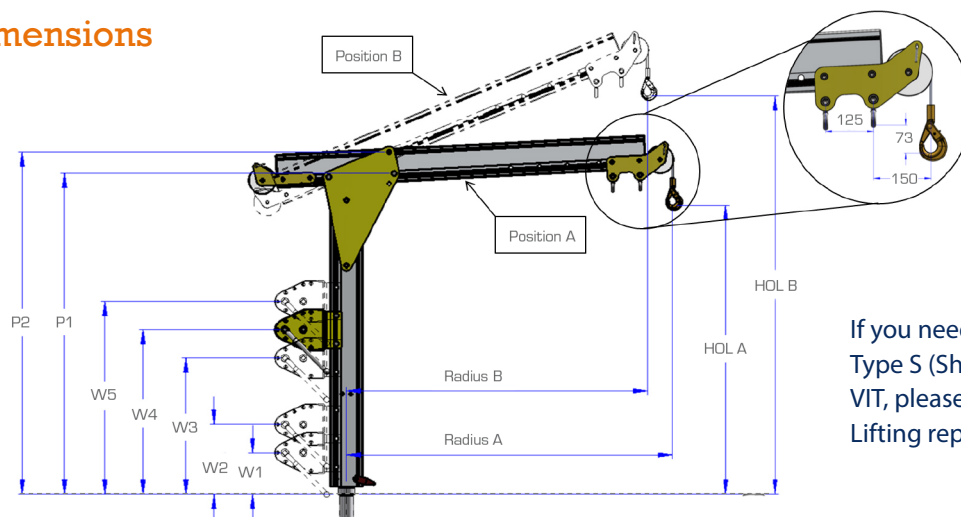

If you need dimensions for a Type S (Shackle only) T-DA-VIT, please contact a REID Lifting representative

Beam Option	1		2		3		4	
Position	A	B	A	B	A	B	A	B
Radius (mm)	1000	925	1200	1110	1600	1478	2000	1850
Load Rating 1 (kg)	500		400		300		250	
Load Rating 2 (kg)	500		500		375		300	

Column Option	Height of Lift (HOL) (mm)								Winch Position		P1	P2
	A	B	A	B	A	B	A	B				
1	839	1151	839	1227	839	1380	839	1532	W1	190	982	1081
									W2	320		
2	1019	1331	1019	1407	1019	1560	1019	1712	W1	190	1162	1261
									W2	320		
									W3	625		
3	1329	1641	1329	1717	1329	1970	1329	2022	W1	190	1472	1571
									W2	320		
									W3	625		
									W4	755		
									W5	885		
4	1644	1956	1644	2032	1644	2195	1644	2337	W3	625	1787	1886
									W4	755		
									W5	885		
5	1954	2266	1954	2342	1954	2495	1954	2647	W5	885	2097	2196

Dimensions are to hook on Winched type above.

VINCA products

- Bridges crane and gantry cranes
- Jib cranes
- Hoists and winches
- Scissor Tables and scissor lifts
- Elevators/Lifts for loads (PLT)
- Dock levelers
- Moving Dock levelers (RMC)
- Coats Furniture
- Wheel-lok (Vehicle Immobilizer)
- Safety equipment for docks
- Vacuum lifters VACU-LIFT
- Industrial Manipulators
- Pallet Inverters /Tippers
- Levelers NIVELMATIC
- Tilters inclinators
- Skips
- Industrial fans
- Industrial flexible doors, high speed doors
- Cold storage doors
- Fire doors
- Safety gates DOK-GUARDIAN
- Festoon for mobile equipment
- Lifting appliances
- Industrial Radio Controls
- After Sales Service for above equipment

Ⓔ ATEX classified equipment as option.



BARCELONA

Tel 93 635 61 20
Fax 93 635 61 30
info@vinca.es

MADRID

Tel: (+34) 616 91 69 82
madrid@vinca.es

VALENCIA

Tel: (+34) 647 817 537
valencia@vinca.es

GALICIA

Tel: (+34) 648 923 832
galicia@vinca.es

C/ Técnica, 39
Pol. Ind. Torre Bovera
08740 St. Andreu de la Barca
BARCELONA
www.vinca.es

