





Lightweight Portable Gantry Tripods TM



Tripod sets	4
Review of tripods and winches	4
Personal Tripods	26
TM 1	26
TM 6	28
TM 7	30
TM 9	32
TM 9-L	34
TM 9-W	
TM 13	
TM 14-SB	
TM 14-ZSE	
Material Tripods	44
TM 6-T	44
TM 7-T	46
TM 9-T	48
TM 11-T2	50
TM 13-T	52
Personal and Material	
O 1 M 1 1	
Combo Tripods	54
TM 12-SPIDER	
_	54
TM 12-SPIDER	54 56
TM 12-SPIDERTM 12-HEXAPOD	54 56
TM 12-SPIDER TM 12-HEXAPOD	54 56 58
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices	54 56 58
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices	54 56 58 60
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices	54 56 58 60
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices RUP 502 RUP 502-A	54 56 58 60 60 62
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices RUP 502 RUP 502-A RUP 502-B	
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices RUP 502 RUP 502-A RUP 502-B RUP 503	
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices RUP 502 RUP 502-A RUP 502-B RUP 503 RUP 503-B	
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices RUP 502 RUP 502-A RUP 503-B RUP 503-B RUP 505	
TM 12-SPIDER	
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices RUP 502 RUP 502-A RUP 503 RUP 503-B RUP 503-B RUP 505-A CRW 200	
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices	54 60 60 62 64 66 70 72 74 76
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices	54 60 60 62 66 66 70 72 74 76 78
TM 12-SPIDER TM 12-HEXAPOD TM 15 Rescue Devices & Lifting Devices	546060626466707274767880














EXAMPLE USES OF TRIPOD SETS

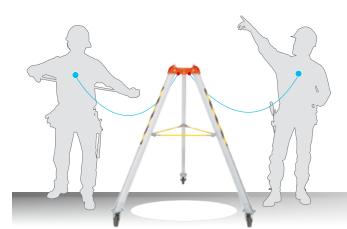

USE OF THE TRIPOD WITHOUT LIFTING DEVICES AS A MOBILE ANCHOR POINT.

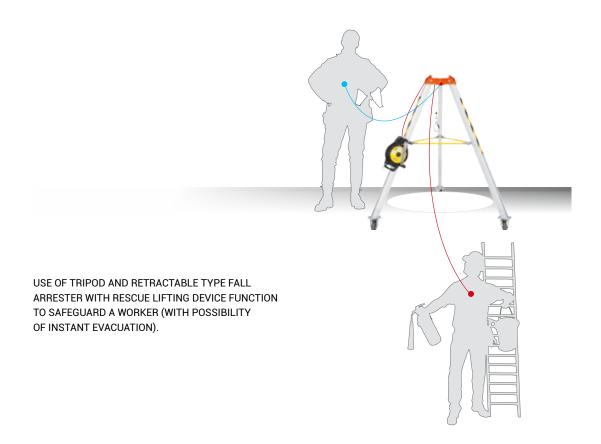



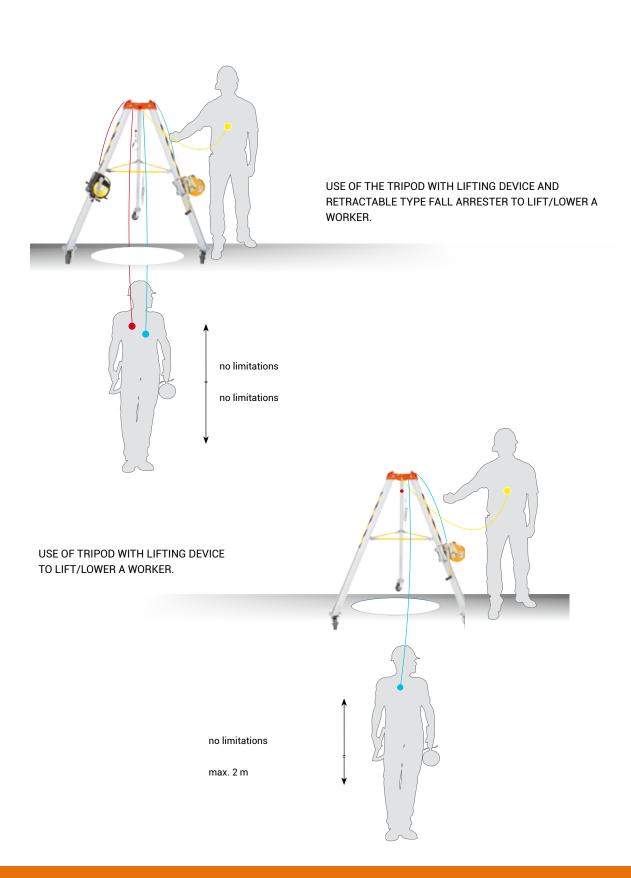







REVIEW OF TRIPODS AND WINCHES

		TM 1	TM 6	TM 6 - T	TM 7	TM 7 - T	TM 9	TM 9 - L	TM 9 - T	TM 9 - W	TM 11 - T2	TM 12	TM 12 - 2	TM 13	TM 13 - T	TM 14 - SB TM 14 - ZSE	ACCESORRIES	WINCH TYPE
	RUP 502																PL 101 + SDW	rescue 140 kg
	RUP 502-A																SDW	rescue 140 kg
	RUP 502-AT																-	material 500 kg
RUP 502	RUP 502-B																PL 101 + SDW	rescue 140 kg
RU	RUP 502-BT																PL 101	material 500 kg
	RUP 502-T																PL 101	material 500 kg
	RUP 503																SDW	rescue 200 kg
23	RUP 503-B																PL 101 + SDW	rescue 200 kg
RUP 503	RUP 503-BT																PL 101	material 1000 kg
	RUP 503-T																-	material 1000 kg
RUP 505	RUP 505																PL 101 + SDW	rescue 150 kg
RU	RUP 505-A																SDW	rescue 240 kg
0	CRW 200 + AT173																PL 101	rescue 140 kg
CRW 200	CRW 200 + AT174																-	rescue 140 kg
	CRW 200 + AZ017																-	rescue 140 kg
00	CRW 300 + AT171																-	rescue 140 kg
CRW 300	CRW 300 + AT172																-	rescue 140 kg
	CRW 300 + AZ017																-	rescue 140 kg
	NUMBER USERS	2	2	-	1	-	1	1	-	1	-	2	2	2	-	2		
M.	AX LOAD VEIGHT	-	-	1000 kg	-	1000 kg	-	-	500 kg	-	1000 kg	1000 kg	1000 kg	-	1000 kg	-		



Ñ	ââ				3Å
Personal 1 person	Personal 2 persons		Material max 500 kg	Material max 1000 kg	Personal and material max. 1000 kg or 2 persons
TM 7	TM 1		TM 9-T	TM 6-T	TM 12
TM 9	TM 6			TM 7-T	TM 12-2
TM 9-L	TM 13			TM 13-T	
TM 9-W	TM 14 (SB and ZSE)		TM 11-T2	
		LIF	TING DEVICES		
	M				R
Rescue up to 140 kg	Rescue up to 200 kg		Material max. 500 kg	Material max. 1000 kg	Fall arrester max. 140 kg
RUP 502	RUP 503		RUP 502-T	RUP 503-T	CRW 200
RUP 502-A	RUP 502-A RUP 503-B		RUP 502-AT	RUP 503-BT	CRW 300
RUP 502-B	RUP 505-A (up to 240 KG)		RUP 502-BT		
RUP 505 (up to 150 KG)		A	CCESSORIES		
Rope guide	Pulley	Pulley	Pulley	Spring	Leg strap for transport



AT015-400



PL 101



PL 415



PL 416





absorber



AT011-500







2 types of work rope terminations are recommended, using figure-of-nine loop to be used with tripods TM 9 and TM 9-W, and thimble-eye with tripods TM 9, TM 9-W and TM 13.



TM 7, TM 7-T, TM TM 9, TM 9-T, TM TM 9-L, TM 9-W


AT011-500 For tripods:

For tripods: TM 11-T2, TM 13, TM 13-T

AT015-500



TM 1 + RUP 502




TM 6 + RUP 502-A




TM 6 + CRW 200 + AT174



TM 6 + CRW 200 + AZ017




TM 1 + CRW 300



TM 6 + RUP 503



TM 6 + CRW 300 + AT172

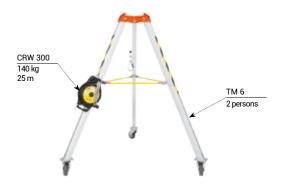

TM 6 + CRW 300 + AZ017







TM 6 + RUP 502-A + CRW 300 + AT172



TM 6 + RUP 503 + CRW 300 + AT172

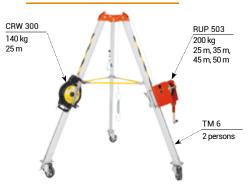


TM 6 + RUP502-A + CRW 300 + AZ017

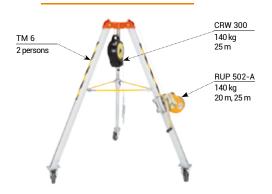


TM 6 + RUP 503 + CRW 300 + AZ017



TM 6 + RUP 502-A + CRW 200 + AT174

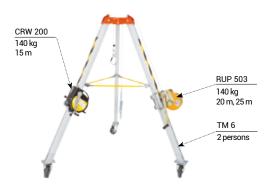


TM 6 + RUP 503 + CRW 200 + AT174

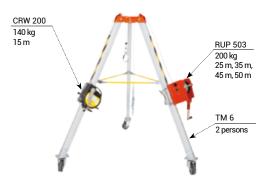

TM 6 + RUP 502-A + CRW 200 + AZ017




TM 6 + RUP 503 + CRW 200 + AZ017

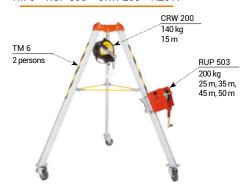





TM 7 + RUP 502-B




TM 7 + CRW 200 + AZ017

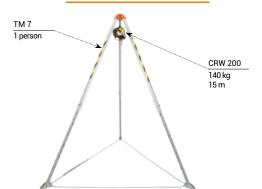

TM 7 + RUP 503-B




TM 7 + CRW 300 + AZ017

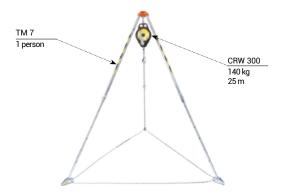




TM 9 + RUP 502 RUP 502-A 140 kg 20 m, 25 m TM 9 1 person

TM 9 + RUP 502 + CRW 200 + AZ017

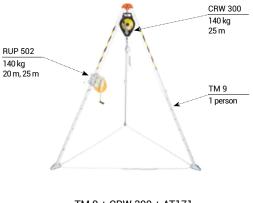


TM 9 + RUP 502 + CRW 300 + AZ017


TM 9 + CRW 300 + AT171

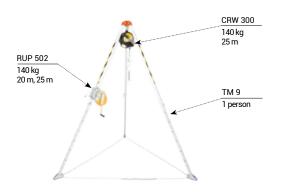


TM 9 + CRW 200 + AT173

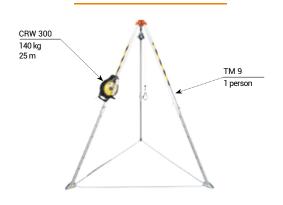


TM 9 + CRW 200 + AZ017

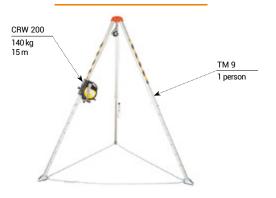

TM 9 + CRW 300 + AZ017

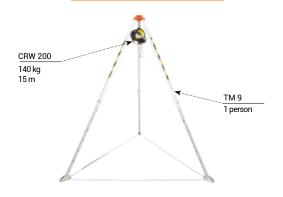

TM 9 + RUP 505

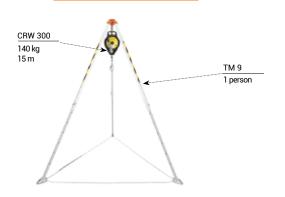







TM 9 + RUP 505 + CRW 200 + AZ 017




TM9 + RUP 505 + CRW 300 + AZ017

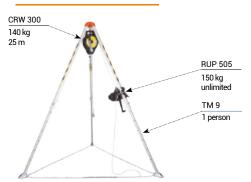


TM 9-W + RUP 502

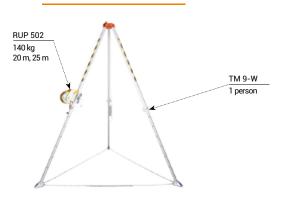


TM 9-W + RUP 502 + AT171 + CRW 300



TM 9-W + RUP 502 + CRW 200 + AT173

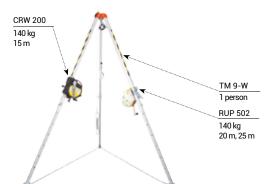


TM 9-W + CRW 200 + AZ017






TM 9-W + CRW 300 + AZ017




TM 9-W + CRW 300 + AT171

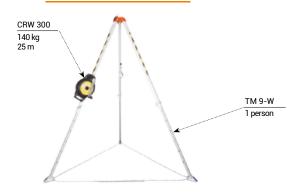


TM 9-W + RUP 505 + CRW 200



TM 9-W + CRW 200 + AT173

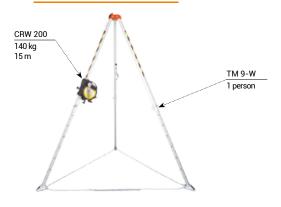

TM 9-W + RUP 505

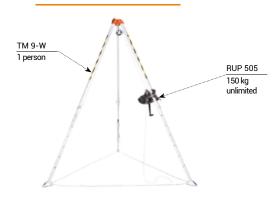

TM 9-W + RUP 505 + CRW 300






TM 9-L + RUP 502


RUP 502
140 kg
20 m, 25 m

TM 9-L
1 person


TM 9-L + RUP 502 + CRW 200 + AZ017

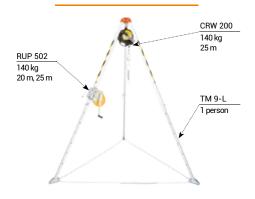


TM 9-L + CRW 200 + AT173




TM 9-L + CRW 300 + AZ017

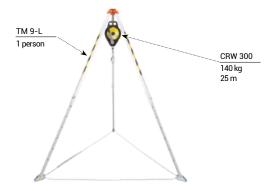


TM 9-L + RUP 502 + CRW 300 + AZ017




TM 9-L + CRW 200 + AZ017



TM 9-L + CRW 300 + AT171

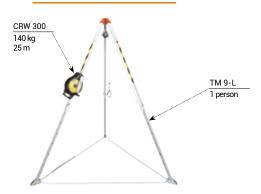

TM 9-L + RUP 505

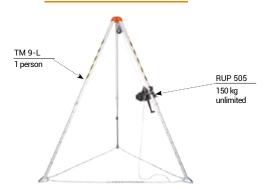







TM 12-2 + RUP 502-A

TM 12-2
2 persons
RUP 502-A
140 kg
20 m, 25 m

TM 12-2 + RUP 503




TM 12-2 + CRW 200 + AT174



TM 12-2 + CRW 200 + AZ017



TM 12-2 + CRW 300 + AT172

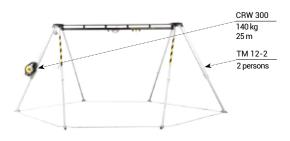

TM 12-2 + CRW 300 + AZ017



TM 12-2 + RUP 502-A + CRW 300 + AZ017



TM 12-2 + RUP 502-A + CRW 200 + AZ017





TM 12-2 + RUP 502-A + AT172 + CRW 300



TM 12-2 + RUP 503 + CRW 300 + AZ017



TM 12-2 + RUP 503 + CRW 300 + AT172



TM 12-2 + RUP 503 + CRW 200 + AZ017



TM 12-2 + RUP 503 + CRW 200 + AT174




TM 12-2 + RUP 502-A + CRW 200 + AT174







TM 13 + RUP 502-A




TM 13 + CRW 300 + AT172

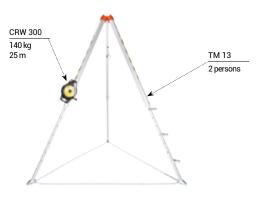


TM 13 + CRW 200 + AT174

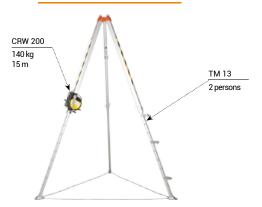


TM 13 + RUP 502-A + CRW 300 + AZ017



TM 13 + RUP 503

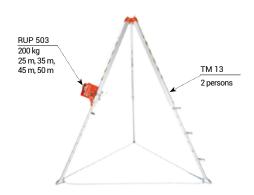

TM 13 + CRW 300 + AZ017

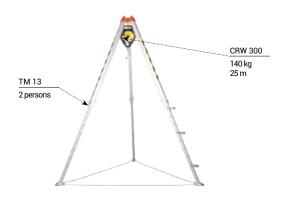

TM 13 + CRW 200 + AZ017




CRW 200

140 kg

TM 13 2 persons


15 m

TM 13 + RUP 502-A + CRW 200 + AZ017







TM 13 + RUP 503 + CRW 300 + AT172

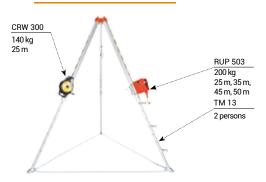


TM 13 + RUP 503 + CRW 200 + AT174




TM 13 + RUP 503 + CRW 300 + AZ017

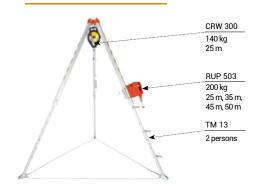


TM 13 + RUP 503 + CRW 200 + AZ017




TM 13 + RUP 502-A + CRW 300 + AT172

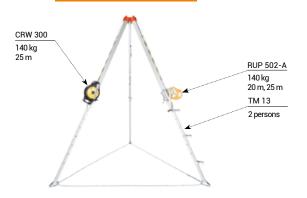

TM 13 + RUP 502-A + CRW 200 + AT174



TM 13 + RUP 505-A




TM 13 + RUP 505-A + CRW 200 + AZ017







TM 13 + RUP 505-A + CRW300 + AZ017

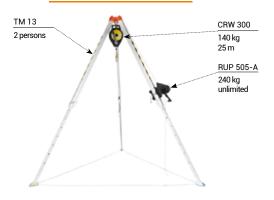


TM 14 + RUP 502-A

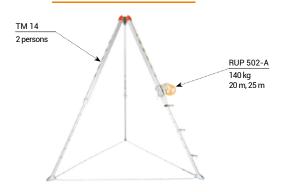


TM 14 + CRW 300 + AT172

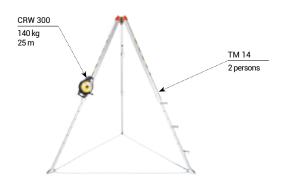


TM 14 + CRW 200 + AT174

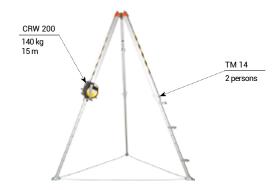


TM 14 + RUP 503

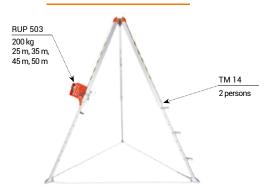

TM 14 + CRW 300 + AZ017

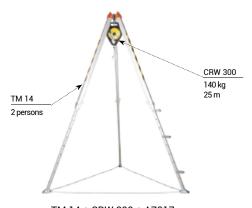


TM 14 + CRW 200 + AZ017

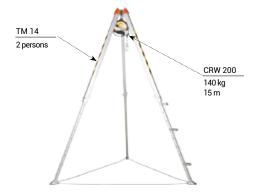





TM 14 + RUP 502-A + CRW 300 + AZ017

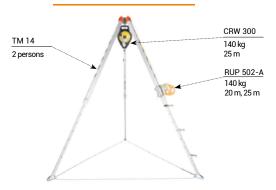


TM 14 + RUP 502-A + CRW 200 + AZ017

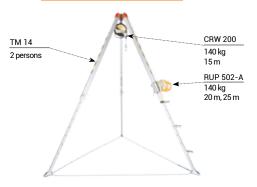


TM 14 + RUP 503 + CRW 300 + AT172

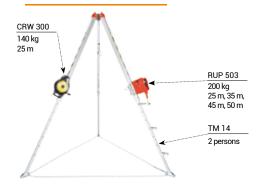


TM 14 + RUP 503 + CRW 200 + AT174

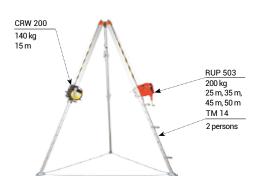


TM 14 + RUP 503 + CRW 300 + AZ017

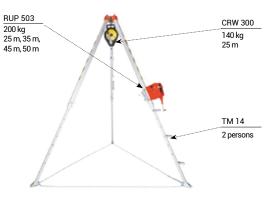


TM 14 + RUP 503 + CRW 200 + AZ017

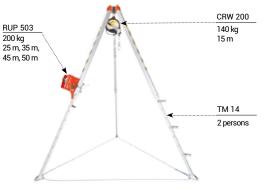

TM 14 + RUP 502-A + CRW 300 + AT172

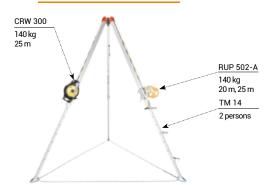

TM 14 + RUP 502-A + CRW 200 + AT174

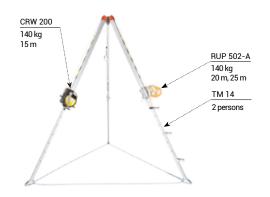



TM 12 + RUP 502-AT + CRW 300 + AZ017



TM 12 + RUP 503-T + CRW 300 + AZ017



TM 12 + CRW 300 + AT172



TM 12 + CRW 300 + AZ017





TM 12-2 + RUP 502-AT + CRW 300 + AT172



TM 12-2 + RUP 503-T + CRW 200 + AT174




TM 12-2 + RUP 503-T + CRW 300 + AZ017



TM 12-2 + RUP 503-T + CRW 200 + AZ017



TM 12-2 + RUP 502-AT + CRW 300 + AT172

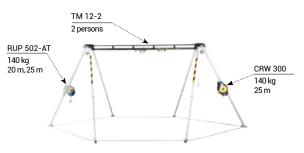


TM 12-2 + RUP 503-T + CRW 200 + AZ017





TM 6-T + RUP 503-T TM 6-T + RUP 502-AT TM 6-T 1000 kg RUP 503-T 1000 kg 25 m, 35 m, RUP 502-AT 500 kg 20 m, 25 m 45 m, 50 m TM 6-T 1000 kg TM 7-T + RUP 502-BT TM 7-T + RUP 503-BT TM 7-T **RUP 503-BT** RUP 502-BT 1000 kg 25 m, 35 m, 45 m, 50 m 500 kg 20 m, 25 m 1000 kg TM 7-T 1000 kg TM 11-T2 + RUP 502-AT TM 12 + RUP 502-AT RUP502-AT 500 kg 20 m, 25 m RUP502-AT 500 kg 20 m, 25 m TM 11-T2 TM 12 1000 kg 1000 kg TM 12 + RUP 503-T TM 12-2 + RUP 502-AT RUP 503-T TM 12-2 1000 kg 25 m, 35 m, 45 m, 50 m 1000 kg RUP 502-AT TM 12 500 kg 20 m, 25 m 1000 kg



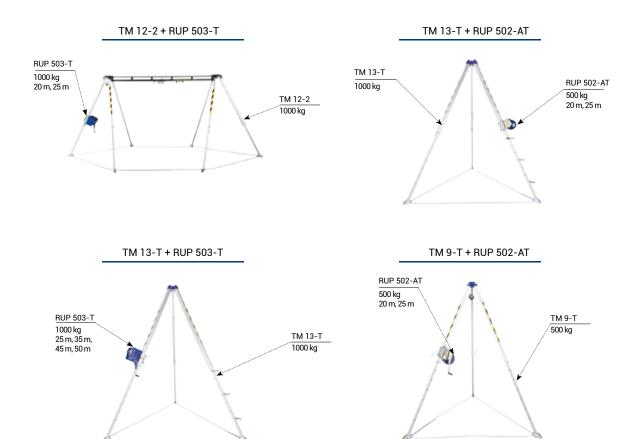









NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013



DESCRIPTION
OF DEVICE:



RUP 502-A RUP 503 CRW 200+AT174 CRW 200+AZ017 CRW 300+AT172 CRW 300+AZ017

Safety tripod TM 6 is a mobile anchoring device intended for protection of up 2 persons at the same time. Guide wheels are integrated with the tripod head enabling operation with rescue lifting devices without the need to use any additional pulley.

Personal Tripods





Pulley has 2 anchor points. Upper anchor point on pulley is used for connecting crane TM 1 to a permanent structure. Lower anchor point on arm is used for installation of rescue lifting devices.



Leg is made of hot-dip galvanized steel, has 4-step adjust - ment, and is locked with a cotter.



Connector enables adjustment of the arm angle and locking in one of 5 positions (from 80° up to 130°) by means of a cotter.





Lower end of leg has a removable foot with rubber pads providing anti-slip protection.

Height:	71 - 280 cm
Opening diameter under tripod:	-
Leg spacing:	-
Device weight:	8 kg
Anchor points on head:	2
Lifting and lowering:	1 person only
Transport dimensions:	190 x 22 x 22 cm



HEAD - PLAN VIEW DIMENSIONS

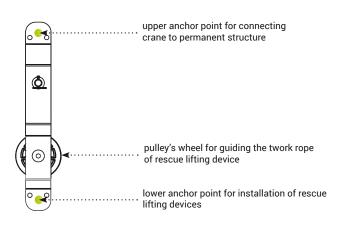











NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013



Max. 2 persons RUP 502-A RUP 503 CRW 200+AT174 CRW 200+AZ017 CRW 300+AT172 CRW 300+AZ017

DESCRIPTION OF DEVICE:

Safety tripod TM 6 is a mobile anchoring device intended for protection of up 2 persons at the same time. Guide wheels are integrated with the tripod head enabling operation with rescue lifting devices without the need to use any additional pulley.

Personal Tripods





The head is made of powder coated galvanized steel. Equipped with 2 wheels for guiding the work rope on rescue lifting devices. Cotters above the wheels protect the rope against accidental slipping during work.



Automatic leg opening locks protect the tripod against accidental collapse during use.



Support bars are made of powder coated galvanized steel. They help stabilize the tripod during work. Each bar is secured with ratchets to prevent it from detaching during work



The tripod legs are made of strengthened aluminium profiles. Two legs "A" are equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; the third leg "B" has no wheel or anchor point.





Two legs "A" are equipped with swivel wheels with brake to provide easier tripod mobility. Wheels are made of aluminium alloy and rubber (wheel) and galvanized steel (housing).

Height:	160 cm
Opening diameter under tripod:	157 cm
Leg spacing:	116 cm
Device weight:	34 kg
Anchor points on head:	3
Lifting and lowering:	maximum 2 persons
Transport dimensions:	200 x 47 x 47 cm

DIMENSIONS:




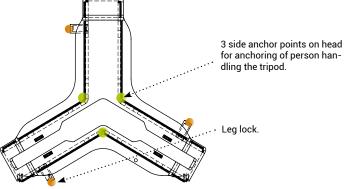







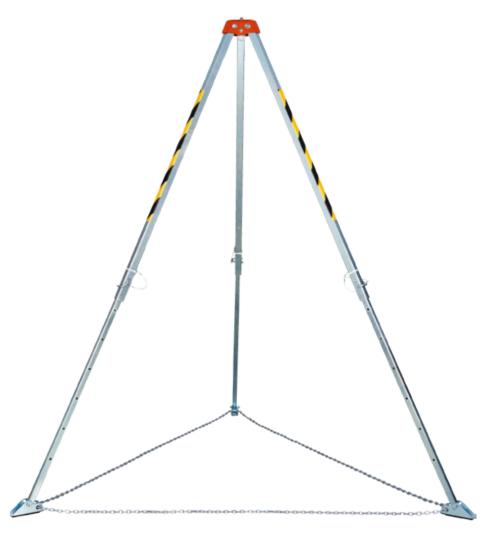

NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012





RUP 502-B RUP 503-B CRW 200+AZ017 CRW 300+AZ017

DESCRIPTION OF DEVICE:

Safety tripod TM 7 is a portable anchoring device intended for single person only. The device is made of fully galvanized steel.

Personal Tripods





The head is made of powder coated galvanized steel and has 1 central anchor point eye bolt and 3 additional side anchor points.



Legs are made of hot-dip galvanized steel with 7-step adjustment, locked with cotters.



Tripod legs can be secured with textile webbing or steel chain.




Tripod legs can be secured with textile webbing or steel

Height:	147 - 229 cm
Opening diameter under tripod:	140 - 213 cm
Leg spacing:	119 - 182 cm
Device weight:	35 kg
Anchor points on head:	4
Lifting and lowering:	1 person only
Transport dimensions:	179 x 23 x 23 cm




DIMENSIONS

HEAD - PLAN VIEW




Central anchor point for pulley.

3 side anchor points on head for anchoring of person handling the tripod.







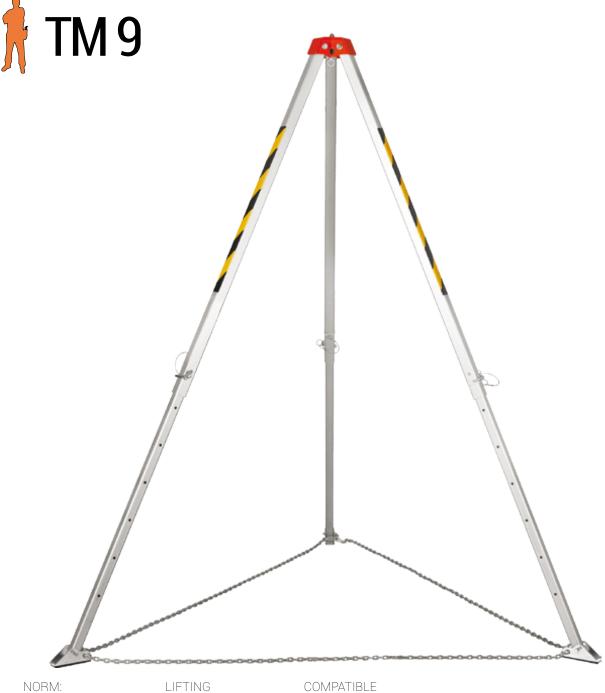

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012



Max. 1 person RUP 502 CRW 200+AZ017 CRW 200+AT173 CRW 300+AZ017 CRW 300+AT171

DESCRIPTION OF DEVICE:

(€ <u>♣</u>

Safety tripod TM 9 is a portable anchoring device intended for single person use only.

Personal Tripods





The head is made of powder coated galvanized steel.1 central anchor point eye bolt and 3 additional side anchor points.



Aluminium legs with 7-step adjustment, locked with cotters



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.





Tripod legs can be secured with textile webbing or steel chain.

Height:	147 - 229 cm
Opening diameter under tripod:	140 - 213 cm
Leg spacing:	119 - 182 cm
Device weight:	17 kg
Anchor points on head:	4
Lifting and lowering:	1 person only
Transport dimensions:	180 x 24 x 24 cm



HEAD - PLAN VIEW DIMENSIONS

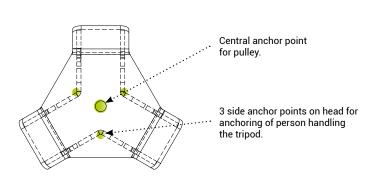







EN 795/B:2012

Max. 2 persons RUP 502 CRW 200+AZ017 CRW 200+AT173

CRW 300+AZ017 CRW 300+AT171

DESCRIPTION OF DEVICE:

(€ <u>♣</u>

Safety tripod TM 9-L is a portable anchoring device intended for single person use only. The head is equipped with locks for securing the tripod legs against unintended folding.

Personal Tripods





The head is made of powder coated galvanized steel. 1 central anchor point eye bolt and 3 additional side anchor points.



Automatic leg opening locks protect the tripod against accidental collapse during use.



Aluminium legs with 7-step adjustment, locked with cotters.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.





HEAD - PLAN VIEW

Tripod legs can be secured with textile webbing or steel chain

Height:	147 - 229 cm
Opening diameter under tripod:	140 - 213 cm
Leg spacing:	119 - 182 cm
Device weight:	17 kg
Anchor points on head:	4
Lifting and lowering:	1 person only
Transport dimensions:	180 x 24 x 24 cm

DIMENSIONS

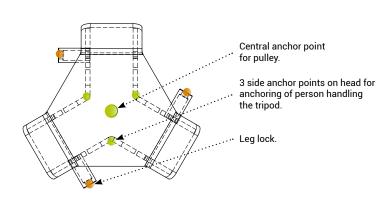










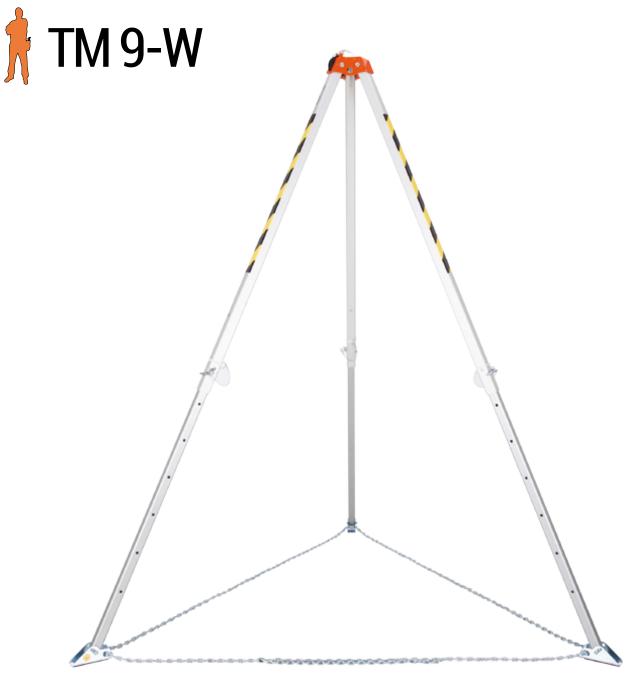

NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012



1 person only

RUP 502 CRW 200+AT173 CRW 300+AT171

DESCRIPTION OF DEVICE:

Safety tripod TM 9-W is a portable use anchoring device which does not requires a pulley when operating winches. Intended for single person use only.

Personal Tripods





The head is made of powder coated galvanized steel. A wheel for guiding the work rope on rescue devices. Cotters above the wheel prevent the rope from accidental slipping during work.



The tripod legs are made of strengthened aluminium profiles. Leg "A" is equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; 2 legs "B" have no wheel or anchor point. The legs feature 7-step adjustment.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.




Tripod legs can be secured with textile webbing or steel chain.


Height:	147 - 229 cm
Opening diameter under tripod:	140 - 215 cm
Leg spacing:	119 - 182 cm
Device weight:	17 kg
Anchor points on head:	3
Lifting and lowering:	1 person only
Transport dimensions:	180 x 24 x 24 cm



HEAD - PLAN VIEW DIMENSIONS



3 side anchor points on head for anchoring of person handling the tripod.







NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013



DESCRIPTION OF DEVICE: Max. 2 persons RUP 502-A RUP 503 CRW 200+AT174 CRW 200+AZ017 CRW 300+AT172 CRW 300+AZ017

Safety tripod TM 13 is a portable anchoring device which does not requires pulley when operating winches. Has steps for easier access to the head. The device can be used by 2 persons at the same time.

Personal Tripods





The head is made of powder coated galvanized steel and has two wheels for guiding the work rope of rescue devices. Cotters above wheels prevent the rope from slipping during work.



The tripod legs are made of strengthened aluminium profiles with 9-step adjustment, locked with cotters. Two legs "A" are equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; the third leg "B" has no wheel or anchor point.



Aluminium steps are mounted with cotters and provide easier access to the tripod head when extending the legs to their maximum height.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.





The tripod's legs can be secured with textile webbing or steel

Height:	179 - 289 cm
Opening diameter under tripod:	158 - 256 cm
Leg spacing:	147 - 232 cm
Device weight:	37 kg
Anchor points on head:	3
Lifting and lowering:	max. 2 persons
Transport dimensions:	200 x 33 x 31 cm



HEAD - PLAN VIEW DIMENSIONS

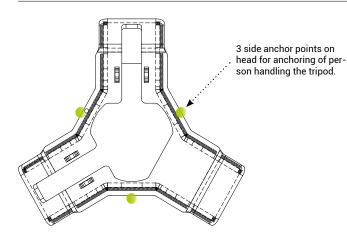










NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013



RUP 502-A RUP 503 CRW 200+AT174 CRW 300+AT172

DESCRIPTION OF DEVICE:

TM 14 is a dual-purpose system: standard safety tripod and rescue frame.

Personal Tripods



EXTENSION KIT FOR TM 14-ZSE



The head is made of powder coated galvanized steel. Two wheels for guiding the work rope rescue devices. Cotters above the wheels prevent the rope from accidental slipping during work.



The tripod legs are made of strengthened aluminium profiles with 9-step adjustment, locked with cotters. Two legs "A" are equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; the third leg "B" has no wheel or anchor point.



Aluminium steps are mounted with cotters and provide easier access to the tripod head when extending the legs to their maximum height.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.




HEAD - PLAN VIEW

Tripod legs can be secured with textile webbing or

Height:	179 - 289 cm
Opening diameter under tripod:	158 - 256 cm
Leg spacing:	147 - 232 cm
Device weight:	38 kg
Anchor points on head:	3
Lifting and lowering:	max. 2 persons
Transport dimensions:	228 x 32 x 30 cm

Additional option - kit AT015-150

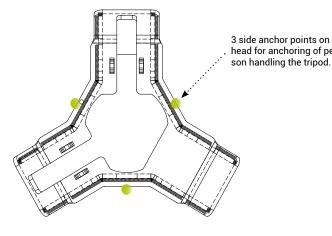

3 side anchor points on head for anchoring of perThe kit upgrades tripod TM 14-SB to version TM 14-ZSE

- The kit comprises:
 Pulley 1 pc
 Bracket 2 pcs
- Head support 1 pc
- Drive-on plate 1 pc Left bracket base 1 pc
- Right bracket base 1 pc
- Chain 1 pc

DIMENSIONS

Dimensions are trhe same as TM 13 tripod (previous page).







NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013



Max. 2 persons RUP 502-A RUP 503 CRW 200+AT174 CRW 300+AT172

(€ 🔬

DESCRIPTION OF DEVICE:

TM 14 is a dual-purpose system: standard safety tripod and rescue frame.

Personal Tripods





The pulley is made of powder coated galvanized steel and has a wheel for guiding the winch rope when used as rescue frame. The pulley has an additional anchor point which can be used for e.g. mounting a retractable type fall arrester.



Supports with feet provide stability for arm with pulley at its end. They are made of aluminium and galvanized steel.



In order to improve the strength of the structure, the tripod legs with supports at their ends are secured with a steel chain.




The drive-on plate is made of galvanized and stainless steel and is used for installation of counterweight. Counterweight can be a set of steel plates or a vehicle weighing 3.5 t. The plate can be fixed to the ground by means of mechanical or chemical anchors.




Set of steel plates can be used as counterweight if the tripod cannot be anchored by a vehicle or fixed to the ground. Comprises 19 special plates made of powder coated steel of 25 kg each.

Height:	208 cm
Extension:	71 cm
Overall length:	362 cm
Leg spacing:	165 cm
Weight:	65 kg
Lifting and lowering:	max 200 kg

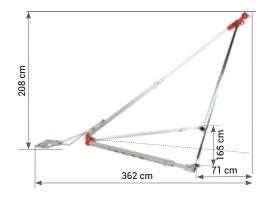


ANCHORING TO THE GROUND




Drive-on plate can be fixed to a concrete or steel surface by means of at least 2 mechanical or chemical anchors with minimum tensile strength of 12 kN.

VEHICLE AS A COUNTERWEIGHT

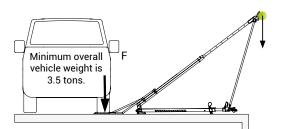

Drive-on plate can be loaded by placing a vehicle wheel on the axle at which the motor is installed. Minimum overall vehicle weight is 3.5 tons.

SET OF STEEL PLATES AS A COUNTERWEIGHT



Drive-on plate can be additionally loaded with special steel counterweight plates of 25 kg each.

STEEL PLATES SET AT015-600.

- Counterweight plates 16 pcs
- Set of mounting screws 1 pc
- · Counterweight bracket rods 2 pcs
- Rods plate 1pc





DESCRIPTION OF DEVICE:

Material tripod TM 6-T is a mobile anchoring device intended for lifting and lowering loads of maximum weight up to 1000 kg. Guiding wheels are integrated with the tripod head enabling operation with rescue lifting devices

Material Tripods





The head is made of powder coated galvanized steel. Equipped with 2 wheels for guiding the work rope of rescue lifting devices. Cotters above wheels provide protection of the rope from accidental slipping during work.



Automatic leg opening locks protect the tripod against accidental collapse during use.



Support bars are made of powder coated galvanized steel. They stabilize the tripod during work. Each bar is secured with ratchets protecting them against being taken out during work.



Tripod legs are made of strengthened aluminium profiles. Two legs "A" — equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches; The third leg "B" is has no wheel or anchor point.





Two legs "A" are equipped with swivel wheels with brake to provide easier tripod mobility. Wheels are made of aluminium alloy and rubber (wheel) and galvanized steel (housing).

Height:	160 cm
Opening diameter under tripod:	157 cm
Leg spacing:	116 cm
Device weight:	34 kg
Anchor points on head:	3
Lifting and lowering:	up to 1000 kg
Transport dimensions:	200 x 47 x 47 cm



HEAD - PLAN VIEW DIMENSIONS

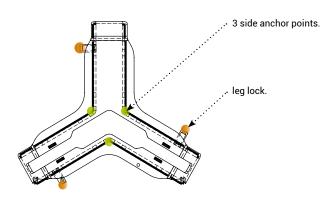







DESCRIPTION OF DEVICE:

TM 7-T is a steel material tripod intended for lifting/lowering loads of maximum weight of up to 1000 kg.

Material Tripods





The head is made of powder coated galvanized steel, and has 1 central anchor point as an eye bolt and 3 additional side anchor points.



Above the head, there is an eye for easier tripod handling.



Legs are made of aluminium, and feature 7-step adjustment, locked with a cotter.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.





The tripod's legs can be secured with textile webbing or steel chain.

Height:	147 - 229 cm
Opening diameter under tripod:	140 - 213 cm
Leg spacing:	1 19 - 182 cm
Device weight:	3 5 kg
Anchor points on head:	4
Lifting and lowering:	up to 1000 kg
Transport dimensions:	180 x 24 x 24 cm




HEAD - PLAN VIEW DIMENSIONS

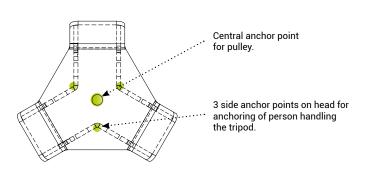





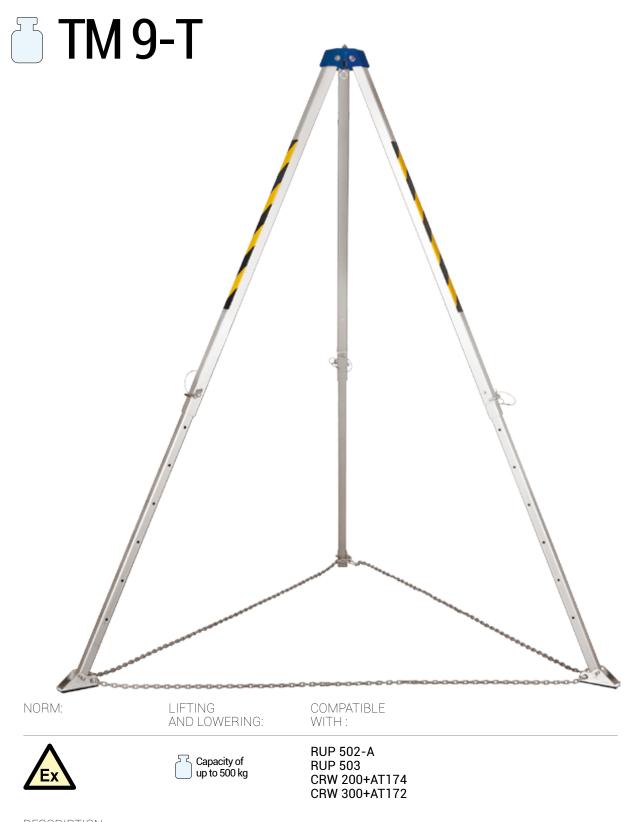

DESCRIPTION OF DEVICE:

TM 9-T is a material tripod intended for lifting/lowering loads of maximum weight of up to 500 kg.

Material Tripods





The head is made of powder coated galvanized steel, and has 1 central anchor point as an eye bolt and 3 additional side anchor points.



Legs are made of aluminium, and feature 7-step adjustment, locked with a cotter.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.



Tripod legs can be secured with textile webbing or steel chain


Height:	147 - 229 cm
Opening diameter under tripod:	140 - 213 cm
Leg spacing:	119 - 182 cm
Device weight:	17 kg
Anchor points on head:	4
Lifting and lowering:	up to 500 kg
Transport dimensions:	180 x 24 x 24 cm




DIMENSIONS

180 cm



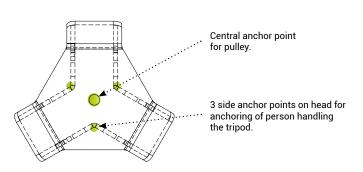









DESCRIPTION OF DEVICE:

TM 11-T2 is a device for material handling, equipped with 4 permanent anchor points with capacity of up to 1000 kg.

Material Tripods





The head is made of powder coated galvanized steel and has 1 central anchor point as an eye bolt and 3 additional side anchor points.



Legs are made of aluminium, and feature 7-step adjustment, locked with a cotter.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.





Tripod legs can be secured with textile webbing or steel

Height:	213 - 322 cm
Opening diameter under tripod:	203 - 300 cm
Leg spacing:	174 - 285 cm
Device weight:	45,5 kg
Anchor points on head:	4
Lifting and lowering:	up to 1000 kg
Transport dimensions:	230 x 32 x 30 cm



HEAD - PLAN VIEW DIMENSIONS

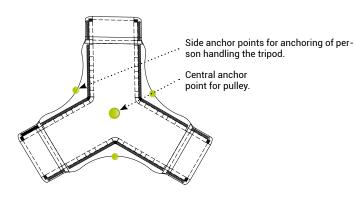









NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:





RUP 502-AT RUP 503-T

DESCRIPTION OF DEVICE:

TM 13-T is a material handling tripod intended for lifting/lowering loads of maximum weight up to 1000 kg.

Material Tripods





The head is made of powder coated galvanized steel and has two wheels for guiding the work rope on rescue or lifting devices. Cotters above wheels prevent the rope from accidental slipping during work.



Tripod legs are made of strengthened aluminium profiles with 9-step adjustment, locked with cotters. Two legs "A" are equipped with a wheel (for guiding the work rope) and anchor point (bore) for mounting winches the third leg "B" has no wheel or anchor point.



Aluminium steps are mounted with cotters and provide easier access to the tripod head when extending the legs to their maximum height.




Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.




Tripod legs can be secured with textile webbing or steel chain.

Height:	179 - 289 cm
Opening diameter under tripod:	158 - 256 cm
Leg spacing:	147 - 232 cm
Device weight:	37 kg
Anchor points on head:	3
Lifting and lowering:	up to 1000 kg
Transport dimensions:	200 x 33 x 31 cm

HEAD - PLAN VIEW DIMENSIONS




Side anchor points for anchoring of person handling the tripod.







TM 12-SPIDER

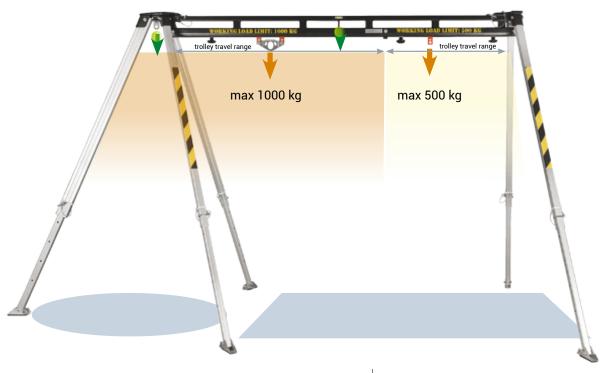

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Spacing of the complete device:	325 - 368 cm
Beam weight:	30 kg
Beam length:	230 cm
Device weight:	76 kg
Maximum permissible load:	1000 kg
Lift / Lowering for:	max. 2 persons
Fixed anchor points:	4
Movable anchor points:	2
Transport dimensions:	254 x 33 x 33 cm



NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013

Max. 2 persons or capacity of up to 1000 kg

RUP 502-A RUP 502-AT RUP 503 RUP503-T CRW 200+AT174 CRW 300+AT172 CRW 200+AZ017 CRW 300+AZ017



DESCRIPTION OF DEVICE:

TM 12 SPIDER is a personnel and material device equipped with 2 movable and 4 fixed anchor points. With the system TM 12 Spider it is possible to use the left tripod as an independent work tripod for handling materials or lifting and lowering personnel.

Personal and Material Combo Tripods





Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 1000 kg or enables lifting/lowering of 1 person.



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 500 kg.



The tripod's beam is made of powder coated galvanized steel, and has 2 permanent anchor points for person handling the tripod. The beam is equipped with a level indicating whether the device is set properly.



The tripod's head is made of powder coated galvanized steel. It is equipped with an attachment point for a pulley and an additional anchor point for attaching of person handling the tripod.




The tripod's legs are made entirely of aluminium, and feature 7-step adjustment for flexible adaptation of the device's height to desired conditions.



Anti-slip tripod's foot can be adjusted to slippery surfaces.



The tripod's legs can be secured with a light textile webbing or a heavier steel chain.

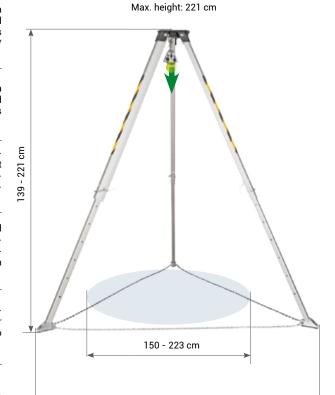


139 - 191 cm

EXTENDED VARIANT - WORK COMBO TRIPOD

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Device weight:	72 kg
Lift / Descent for:	max. 1 person
Fixed anchor points:	2
Maximum permissible load:	1000 kg


EN 795/B:2012 TS 16415/B:2013





TM 12-HEXAPOD

TM 12-2 HEXAPOD

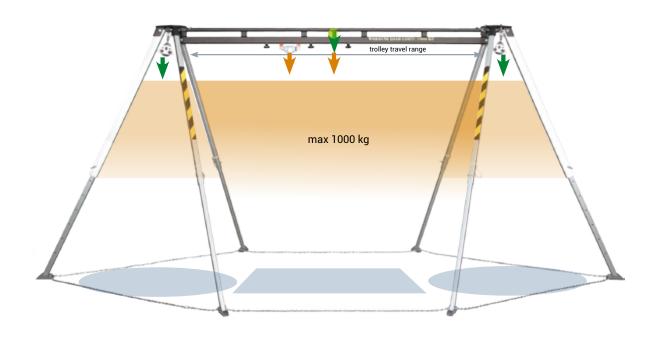

Height:	139 - 221 cm
Opening diameter under tripods:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Spacing of complete device:	464 - 537 cm
Beam weight:	34 kg
Beam length:	280 cm
Device weight:	90 kg
Fixed anchor points:	6
Maximum permissible load:	1000 kg
Lift / Descent for:	max. 2 persons
Movable anchor points:	2
Transport dimensions:	254 x 33 x 33 cm



NORM:

LIFTING AND LOWERING: COMPATIBLE WITH:

EN 795/B:2012 TS 16415/B:2013

Max. 2 persons or capacity of up to 1000 kg

RUP 502-A RUP 502-AT **RUP 503** RUP503-T

CRW 200+AT174 CRW 300+AT172 CRW 200+AZ017 CRW 300+AZ017



OF DEVICE:

DESCRIPTION

TM 12-2 HEXAPOD is a personnel and material device equipped with 2 movable and 6 fixed anchor points.

Personal and Material Combo Tripods





Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 1000 kg or enables lifting/lowering of 1 person.



Steel trolley travelling along the beam is a movable anchor point which can be locked in a fixed position. The point withstands loads of up to 500 kg.



The tripod's beam is made of powder coated galvanized steel, and has 2 permanent anchor points for a person handling the tripod. The beam is equipped with a level indicating whether the device is set properly.



The tripod's head is made of powder coated galvanized steel. It is equipped with an attachment point for a pulley and an additional anchor point for attaching of person handling the tripod.




The tripod's legs are made entirely of aluminium, and feature 7-step adjustment for flexible adaptation of the device's height to desired conditions.



Anti-slip tripod's foot can be adjusted to slippery surfaces.



The tripod's legs can be secured with a light textile webbing or a heavier steel chain.

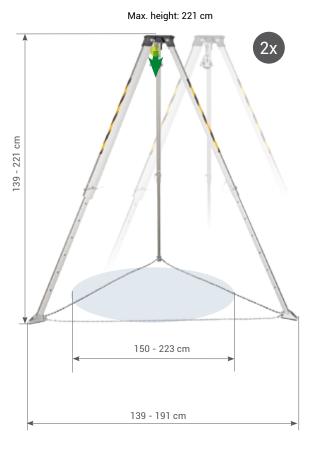


With the system TM 12-2 Hexapod it is possible to use side tripods as independent work tripods for handling materials or lifting and lowering personnel

EXTENDED VARIANT - WORK COMBO TRIPOD

Height:	139 - 221 cm
Opening diameter under tripod:	150 - 223 cm
Tripod spacing:	139 - 191 cm
Device weight:	86 kg
Lift / Descent for:	max. 1 person
Fixed anchor points:	2
Maximum permissible load:	1000 kg









NORM:

LIFTING AND LOWERING: COMPATIBLE
WITH BELOW DEVICES USING NEW UTB BRACKET:

EN 795/B:2012 TS 16415/B:2013

(€



Max. 3 persons or 1000 kg

RUP502/RUP502-T RUP503/RUP503-T CRW 200

The lightweight TM15 aluminium safety tripod is an anchor point according to EN795/B and TS16415/B and can be used as a fall protection equipment. The TM15 tripod provides protection for up to 3 people at a time. The TM15 tripod consists of a powder-coated aluminium head with 3 ball-bearing polyamide rollers. The tripod is also equipped with 3 anchorage points on the side walls of the tripod head. Each of these points can be used as an anchor point for equipment to protect against falls from height. One point is designed for a maximum of one user at a time.

Personal and Material Combo Tripods





The head is made of powder coated aluminum and has three ball-bearing wheels for guiding the work rope on rescue or lifting devices.



Aluminium steps are mounted with cotters and provide easier access to the tripod head when extending the legs to their maximum height.



Steel feet have rubber pads for flat surfaces and spiked edges for slippery surfaces.




The tripod legs are made of strengthened aluminium profiles with 9-step adjustment, locked with cotters. Legs are equipped with a wheels (for guiding the work rope) and anchor point (bore) for mounting winches.

Height:	197 cm - 313 cm
Opening diameter under tripod:	112 cm - 174 cm
Leg spacing:	206 cm
Device weight:	28,7 kg
Anchor points on head:	3
Lifting and lowering:	max.3 persons
Transport dimensions:	226 x 33 x 30 cm



HEAD - PLAN VIEW DIMENSIONS

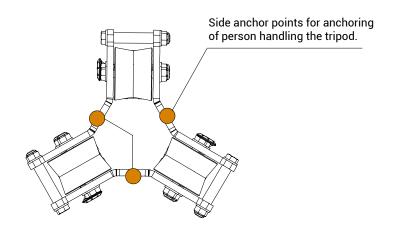










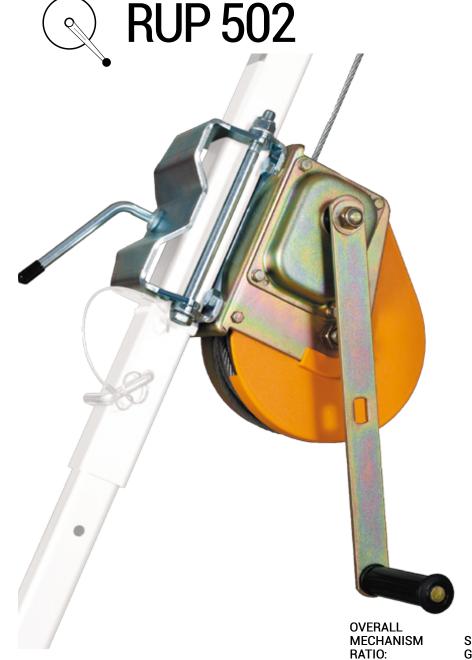

RUP 502 is a winch equipped with a clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 20 and 25 m in length and 6.3 mm in diameter;

RUP 502 is a component of rescue equipment. The device, can be lifted from a lower level onto a higher level or vice-versa.

The descent distance cannot be more than 2 m.

With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank.

The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

The RUP 502 rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

Pulley PL 101

CABLE LENGTH VARIANTS:

---- 20 m ----- 25 m CABLE PARAMETERS:



 \varnothing

ø 6,3 mm

Variant 1 1 : 25



Variant 2 1:12 SPUR COMPATIBLE GEARING: WITH:





TM 9 TM 9-L TM 9-W

1:5

Rescue Devices & Lifting Devices







LOADS:

Variant 1:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 5.6 kG.

Variant 2:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 11.6 kG.





ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- 1. Clamp opened;
- 2. Clamp closed.







KIT:

Rescue winch RUP 502 is offered with pulley PL 101 and spring-type energy absorber SDW.

MAIN FEATURES:

Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:5
Force applied to lift 140 kg for variant 1:	5,6 kG
Force applied to lift 140 kg for variant 2:	11,6 kG
Permissible work load:	140 kg
Compatible with tripod types:	TM9, TM9-L, TM9-W
Standard:	EN 1496/B





1 person at max. 140 kg







RUP 502-A



RUP 502-A is a winch equipped with a clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 20 and 25 m in length and 6.3 mm in diameter;

RUP 502-A is a component of rescue equipment. The device, can be lifted from a lower level onto a higher level or vice-versa.

The descent distance cannot be more than 2 m.

With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank.

The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

The RUP 502-A rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

CABLE
CADLL
I FNGTH
LLINGIII
VARIANTS:
VALUANI 3.

20 m 25 m

CABLE PARAMETERS:



ø 6,3 mm

OVERALL MECHANISM RATIO:



Variant 1 1:25



SPUR

GEARING:

TM 6 TM 12 TM 12-2 TM 13


WITH:


COMPATIBLE

Variant 2 1:12

Rescue Devices & Lifting Devices








LOADS:

Variant 1:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 5.6 kG.

Variant 2:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 11.6 kG.





ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- 1. Clamp opened;
- 2. Clamp closed.





KIT:

Rescue winch RUP 502-A is offered with spring-type energy absorber SDW.

MAIN FEATURES:

Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter.	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:5
Force applied to lift 140 kg for variant 1:	5,6 kG
Force applied to lift 140 kg for variant 2:	11,6 kG
Permissible work load:	140 kg
Compatible with tripod types:	TM6, TM13, TM12, TM12-2
Standard:	EN 1496/B



EN 1496/B

1 person at max. 140 kg







RUP 502-B is a winch equipped with a clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 20 and 25 m in length and 6.3 mm in diameter;

RUP 502-B is a component of rescue equipment. The device, can be lifted from a lower level onto a higher level or vice-versa.

The descent distance cannot be more than 2 m.

With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank.


The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

The RUP 502-B rescue device complies with EN 1496/B.


Accessories:

Spring-type energy absorber SDW

Pulley PL 101

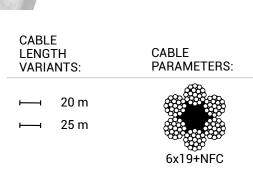





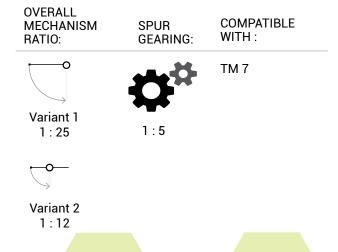

Rescue Devices & Lifting Devices







LOADS:

Variant 1:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 5.6 kG.

Variant 2:

At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 11.6 kG.





ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- 1. Clamp opened;
- 2. Clamp closed.







KIT:

Rescue winch RUP 502-B is offered with pulley PL 101 and spring-type energy absorber SDW.

MAIN FEATURES:

Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:5
Force applied to lift 140 kg for variant 1:	5,6 kG
Force applied to lift 140 kg for variant 2:	11,6 kG
Permissible work load:	140 kg
Compatible with tripod types:	TM7
Standard:	EN 1496/B






1 person at max. 140 kg







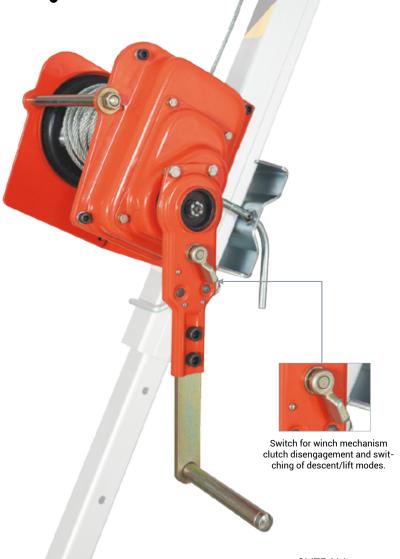

RUP 503 is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern, available in options of 25 m, 35 m, 45 m, 50 m in length and 6.3 mm in diameter;

RUP 503 is a component of rescue equipment. Usingthe device, a casualty can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than 2 m;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.2 turns of the winch's crank;

Crank arm can be disassembled for easier transport;

The RUP 503 rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

CABLE LENGTH VARIANTS:	CABLE PARAMETERS:
25 m	
35 m	
⊷ 45 m	6x19+NFC
50 m	\bigcirc
	ø 6,3 mm

OVERALL MECHANISM RATIO:	SPUR GEARING:	COMPATIBLE WITH :
	₽	TM 6 TM 12 TM 12-2

1:27

Rescue Devices & Lifting Devices





F_k = Force applied to crank Ratio: 1:27

LOADS:

At load weight (Fmax) of 200 kg force applied to the crank (Fk) shall be 7.41 kG.



ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- Clamp opened;
 Clamp closed.

KIT:

Rescue winch RUP 503 is offered with spring-type energy absorber SDW.

MAIN FEATURES:

Winch weight depending on cable length:	22,5 kg to 26,2 kg
Cable length:	25 m, 35 m, 45 m or 50 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:7,2
Force required for pulling load with weight of 200 kg:	7,41 kG
Permissible work load:	200 kg
Compatible with tripod types:	TM6, TM12, TM12-2, TM13
Standard:	EN 1496/B




EN 1496/B



at max. 200 kg





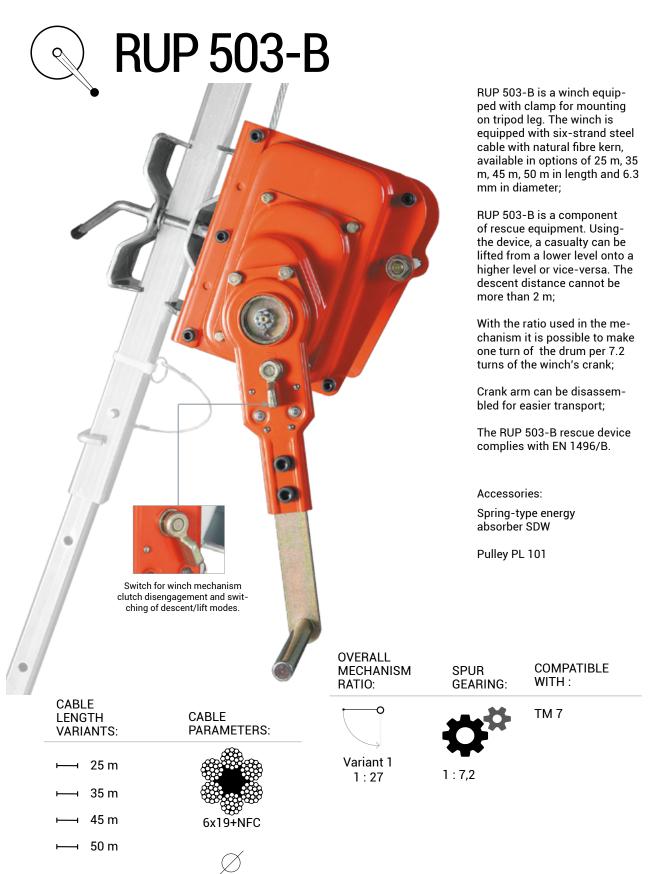

ø 6,3 mm

Rescue Devices & Lifting Devices





LOADS:

At load weight (Fmax) of 200 kg force applied to the crank (Fk) shall be 7.41 kG.



ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- Clamp opened;
 Clamp closed.

KIT:

Rescue winch RUP 503-B is offered with pulley PL 101 and spring-type energy absorber SDW.

MAIN FEATURES:

Winch weight depending on cable length:	22,5 kg to 26,2 kg
Cable length:	25 m, 35 m, 45 m or 50 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:7,2
Force required for pulling load with weight of 200 kg:	7,41 kG
Permissible work load:	200 kg
Compatible with tripod types:	TM7
Standard:	EN 1496/B



EN 1496/B









RUP 505 is a rescue lifting device equipped with clamp for mounting of the device on a tripod leg. The lifting device operates with static textile ropes of length as required by the customer. The rope should be ordered separately.

RUP 505 is a component of rescue equipment. Using the device, a casualty can be lifted from a lower level onto a higher level or vice-versa. The descent distance cannot be more than

With the ratio used in the mechanism it is possible to make one turn of the drum per 2.13 turns of the device's crank or in the second mode, 6.2 turns;

The crank is easily dismounted to facilitate transport;

The RUP 505 rescue device complies with EN 1496/B.

Accessories:

Spring-type energy absorber SDW

Pulley PL 101

CABLE LENGTH VARIANTS:

CABLE PARAMETERS:

- unlimited

Rope sold separately

ø 10-11 mm

OVERALL MECHANISM RATIO:

SPUR GEARING: **COMPATIBLE** WITH:



TM 9. TM 9-W



Variant 2

1:39,9


Variant 1



1:6,28

Rescue Devices & Lifting Devices



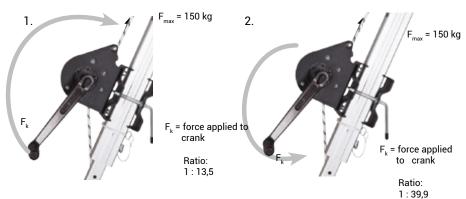

LOADS:

Variant 1:

At load weight (Fmax) of 150 kg force applied to the crank (Fk) shall be 11,11 kG

Variant 2:

At load weight (Fmax) of 150 kg force applied to the crank (Fk) shall be 3,75 kG





INSTALLATION:

Simple mounting of the device on the tripod leg by means of a clamp:

- 1. Clamp opened
- 2. Clamp closed.







KIT:

Rescue lifting device RUP 505 is offered with spring-type energy absorber SDW.

MAIN FEATURES:

Lifting device weight:	8 kg
Rope length:	unlimited
Rope type:	od 10 do 11 mm
Rope diameter.	static textile rope conforms with EN 1891
Mechanism ratio 1:	1 : 2,13
Mechanism ratio 2:	1 : 6,28
Force applied to lift 150 kg kg for variant 1:	11,11 kG
Force applied to lift 150 kg kg for variant 2:	3,75 kG
Permissible work load:	150 kg
Compatible with tripod type:	TM9, TM9-W
Standard:	EN 1496/B







Personal lifting device for up to 150 kg





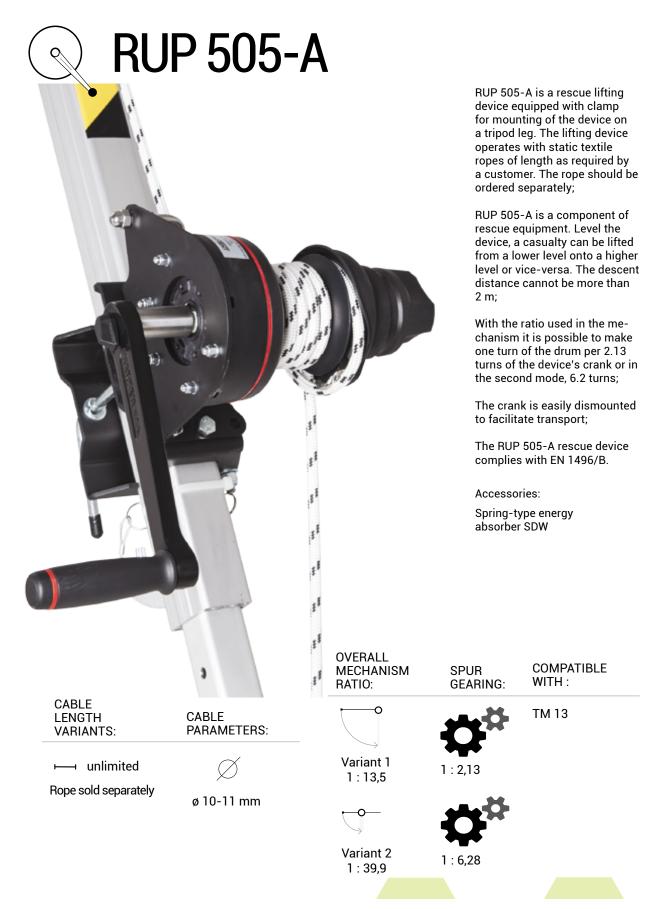



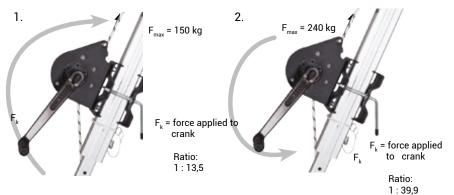

LOADS:

Variant 1:

At load weight (Fmax) of 240 kg force applied to the crank (Fk) shall be 17.7 kg.

Variant 2:

At load weight (Fmax) of 240 kg force applied to the crank (Fk) shall be 6 kg.





INSTALLATION:

Simple mounting of the device on the tripod leg by means of a clamp:

- 1. Clamp opened
- 2. Clamp closed.





KIT:

Rescue lifting device RUP 505-A is offered with spring-type energy absorber SDW.

MAIN FEATURES:

Lifting device weight:	8 kg
Rope length:	unlimited
nope length.	uriiirriited
Rope type:	od 10 do 11 mm
Rope diameter:	static textile rope conforms with EN 1891
Mechanism ratio 1:	1:2,13
Mechanism ratio 2:	1 : 6,28
Force applied to lift 200 kg kg for variant 1:	17,7 kG
Force applied to lift 200 kg kg for variant 2:	6 kG
Permissible work load:	240 kg
Compatible with tripod type:	TM13
Standard:	EN 1496/B

ADDITIONAL OPTION:

Rope guide

Guide a textile rope when tripod TM 13 is used with lifting device RUP 505-A.



EN 1496/B



Personal lifting device for up to 240 kg







CRW 200 is a combination of a retractable type fall arrester and a rescue lifting device. The device is equipped with a manual winch featuring lift and descent functions. In order to install on the tripod, first mount an adequate mounting clamp;

Connector has a fall indicator; the design requires no energy absorber;

Permissible work load: 140 kg;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.4 turns of the winch's crank;

Retractable type fall arrester CRW 200 is a component of personal fall protection equipment and conforms to EN 360 and EN 1496/B.



At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 6.4 kG.

CABLE LENGTH **VARIANTS:**

CABLE PARAMETERS:

15 m



7x19 + IWRC



ø 4,7 mm

OVERALL MECHANISM SPUR

Variant 1 1:22

RATIO:

GEARING:

1:8,8

COMPATIBLE WITH:

Compatible with ALL personal tripod types.








Clamp for mounting retractable type fall arrester CRW 200 on the tripod leg. According to the leg thickness, either clamp AT 173 or AT 174 is used. The clamp is simple to mount and is made of galvanized steel. Above is an example mounting of clamp AT 173 on tripod TM 9 leg.

Example mounting of fall arrester CRW 200 by means of clamp AT 173 on tripod TM 9 leg.







Example mounting of fall arrester CRW 200 by means of side anchor point on tripod TM 9 head.

Winch weight:	11 kg	
Cable length:	15 m	
Cable diameter:	4,8 mm	
Cable type:	7x19+IWRC	
Mechanism ratio:	1 : 8,8	
Force required for pulling load with weight of 140 kg:	6.4 kG	
Permissible work load: 140 kg		
Standard:	EN 1496/B	
When clamp AT 173 is used, compatible with tripod type: TM9, TM9-L, TM9-W		
When clamp AT 174 is used, compatible with tripod type:	TM6, TM12, TM12-2, TM13	
When connector AZ 017 is used, compatible with tripod type:	TM6, TM7, TM9, TM9-L, TM10, TM12, TM12-2, TM13	









CABLE LENGTH VARIANTS:

— 25 m

CABLE PARAMETERS:

7x19 + IWRC

ø 4,7 mm

CRW 300 is a combination of a retractable type fall arrester and a rescue lifting device. The device is equipped with a manual winch featuring lift and descent functions. In order to install on the tripod, first mount an adequate mounting clamp;

Connector has a fall indicator; the design requires no energy absorber;

Permissible work load: 140 kg;

With the ratio used in the mechanism it is possible to make one turn of the drum per 7.4 turns of the winch's crank;

Retractable type fall arrester CRW 300 is a component of personal fall protection equipment and conforms to EN 360 and EN 1496/B.



At load weight (Fmax) of 140 kg force applied to the crank (Fk) shall be 6.3 kG.

OVERALL MECHANISM RATIO:

SPUR GEARING: COMPATIBLE WITH:


Compatible with ALL personal tripod types.

Variant 1 1:22

1:7,4









Example mounting of fall arrester CRW 300 by means of clamp AT 172 on tripod TM 13 leg.



Side anchor point on tripod head can be used to attach fall arrester CRW 300 by means of connector AZ 017.




Example mounting of fall arrester CRW 300 by means of side anchor point on tripod TM 6 head.

Winch weight:	15 kg	
Cable length:	25 m	
Cable diameter:	4,8 mm	
Cable type:	7x19 + IWRC	
Mechanism ratio:	1:7,4	
Force required for pulling load with weight of 140 kg:	6.3 kG	
Permissible work load:	140 kg	
Standard:	EN 1496/B	
When clamp AT 171 is used, compatible with tripod type: TM9, TM9-L, TM9-V		
When clamp AT 172 is used, compatible with tripod type:	TM6, TM12, TM12-2, TM13	
When connector AZ 017 is used, compatible with tripod type: TM6, TM7, TM TM10, TM12,		







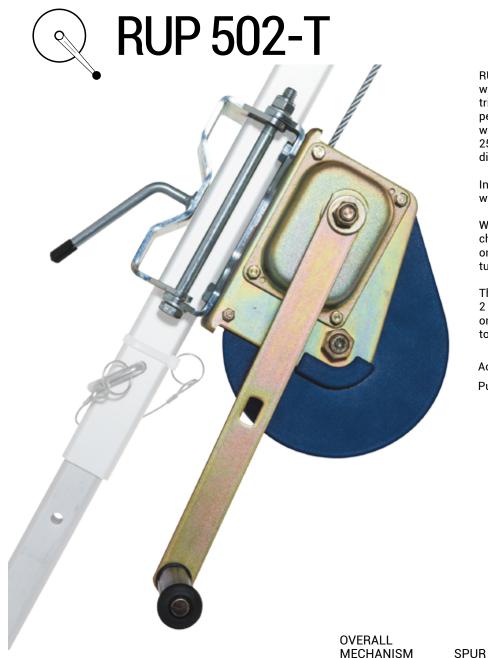

RUP 502-T is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 20 and 25 m in length and 6.3 mm in diameter;

Intended for lifting loads with weight of up to 500 kg;

With the ratio used in the mechanism it is possible to make one turn on the drum per 5 turns of the winch's crank;

The crank arm is available in 2 lengths which, depending on the variant chosen, enable torque adjustment;


COMPATIBLE


Accessories:

Pulley PL 101

		RATIO:	GEARING:	WITH:	
CABLE LENGTH VARIANTS:	CABLE PARAMETERS:		O th	TM 9-T	
20 m		Variant 1 1 : 25	1:5		
25 m	6x19+NFC				
	\varnothing	→ Variant 2 1 : 12			
	ø 6,3 mm				







LOADS:

Variant 1:

At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 20 kG.

Variant 2:

At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 41.6 kG.

1.





ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- 1. Clamp opened;
- 2. Clamp closed.







KIT:

Rescue winch RUP 502-T is offered with pulley PL 101.

Winch weight:	13 kg, 14 kg	
Available cable variants:	20 m, 25 m	
Cable diameter:	6,3 mm	
Cable type:	6x19 + NFC	
Mechanism ratio:	1:5	
Force applied to lift 140 kg for variant 1:	20 kG	
Force applied to lift 140 kg for variant 2:	41,6 kG	
Permissible work load:	500 kg	
Compatible with tripod types:	TM9-T	












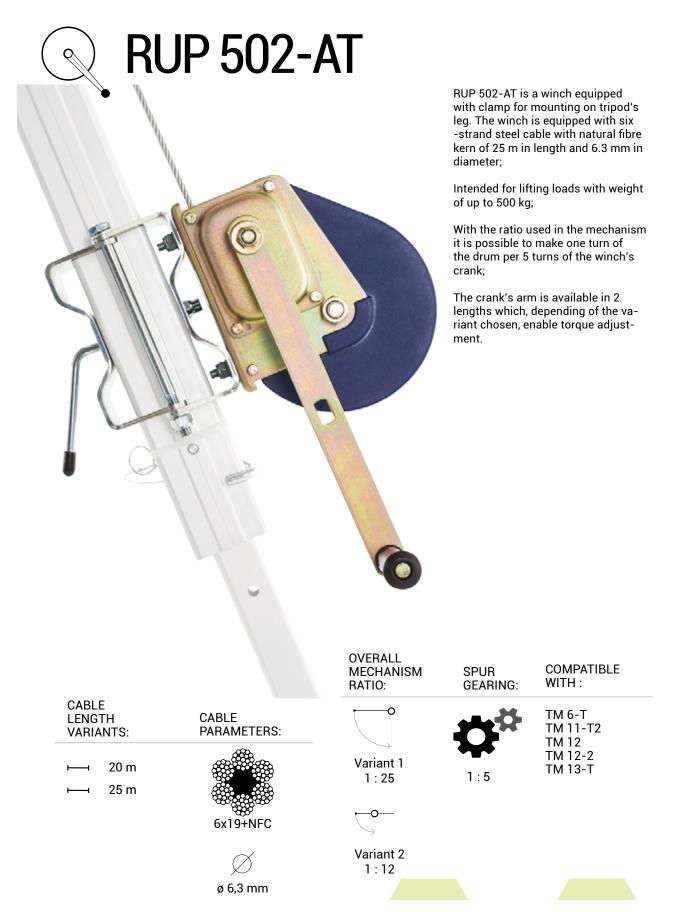




ASSEMBLY:



Mounting winch on tripod's leg - clamp opened and closed.

LOADS:

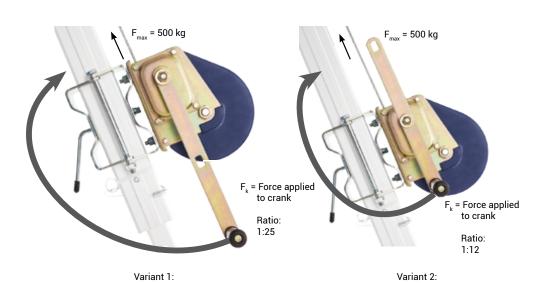

At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 20

kG.

At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 41.6 kG.

Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:5
Force applied to lift 140 kg for variant 1:	20 kG
Force applied to lift 140 kg for variant 2:	41,6 kG
Permissible work load:	500 kg
Compatible with tripod types:	TM6-T, TM11-T2, TM- 13-T, TM12, TM12-2







RUP 502-BT





RUP 502-BT is a winch equipped with clamp for mounting on tripod leg. The winch is equipped with six-strand steel cable with natural fibre kern of 25 m in length and 6.3 mm in diameter:

Intended for lifting loads with weight of up to 500 kg;

With the ratio used in the mechanism it is possible to make one turn of the drum per 5 turns of the winch's crank;

The crank arm is available in 2 lengths which, depending of the variant chosen, enable torque adjustment.

Accessories:

Pulley PL 101

CABLE	
LENGTH	CABLE

---- 20 m ---- 25 m

VARIANTS:

CABLE PARAMETERS:



Ø 6,3 mm

MECHANISM RATIO:



Variant 1 1 : 25



SPUR

GEARING:

•

COMPATIBLE


WITH:


TM 7-T

 $\overline{}$

Variant 2 1:12







LOADS:

Variant 1:


At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 20 kG.

Variant 2:

At load weight (Fmax) of 500 kg force applied to the crank (Fk) shall be 41.6 kg.

1.





ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- 1. Clamp opened;
- 2. Clamp closed.





KIT:

Rescue winch RUP 502-BT is offered with pulley PL 101.


Winch weight:	13 kg, 14 kg
Available cable variants:	20 m, 25 m
Cable diameter:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:5
Force applied to lift 140 kg for variant 1:	20 kG
Force applied to lift 140 kg for variant 2:	41,6 kG
Permissible work load:	500 kg
Compatible with tripod types:	TM7-T









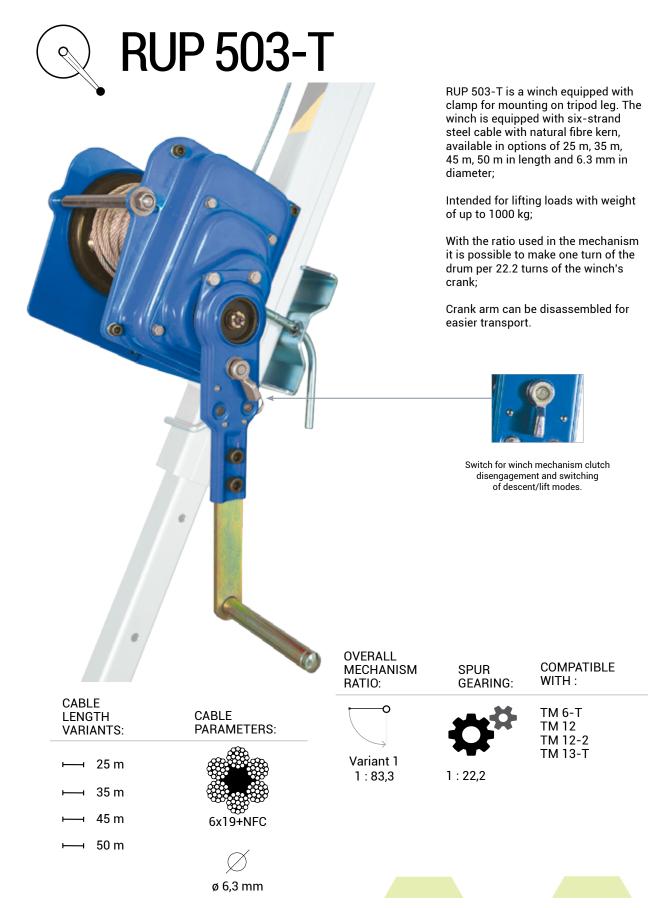




ASSEMBLY:



Mounting winch on tripod leg – clamp opened and closed.

LOADS:

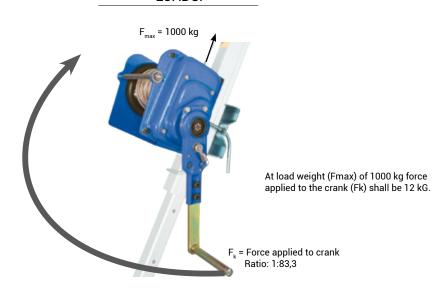


Winch weight:	22,5 kg to 26,2 kg
Cable diameter.	25 m, 35 m, 45 m or 50 m
Cable type:	6,3 mm
Cable type:	6x19 + NFC
Mechanism ratio:	1:22,2
Force required for pulling load with weight of 1000 kg:	12 kG
Permissible work load:	1000 kg
Compatible with tripod types:	TM6-T, TM12, TM12-2, TM13-T










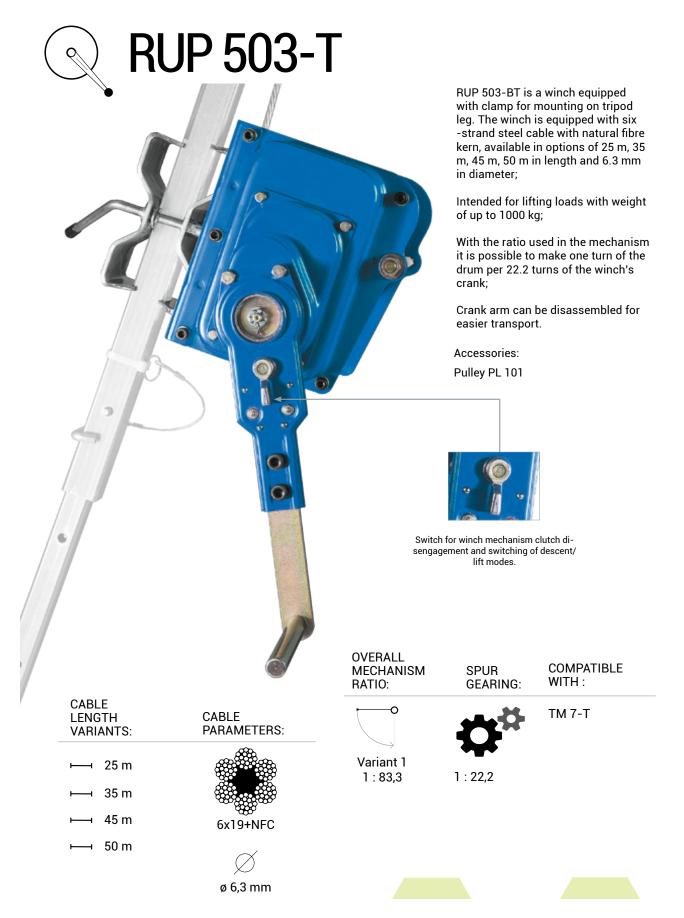



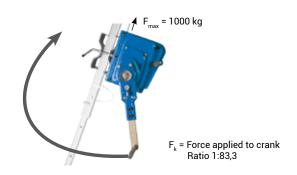

LOADS:

At load weight (Fmax) of 1000 kg force applied to the crank (Fk) shall be 12 kG.



ASSEMBLY:

Simple mounting of the winch on the tripod leg by means of a clamp:

- Clamp opened;
 Clamp closed.

KIT:

Rescue winch RUP 503-BT is offered with pulley PL 101.

Winch weight:	22,5 kg to 26,2 kg	
Cable diameter.	25 m, 35 m, 45 m or 50 m	
Cable type:	6,3 mm	
Cable type:	6x19 + NFC	
Mechanism ratio:	1:22,2	
Force required for pulling load with weight of 1000 kg:	12 kG	
Permissible work load:	1000 kg	
Compatible with tripod types:	TM7-T	







PULLEYS



PULLEYS PL 101, TU 415, TU 416





CABLE DIAMETER:

- max. 6.3 mm for steel cable
- between 8 and 12 mm for textile rope

WORK LOAD:

Permissible work load:

10 kN

CABLE DIAMETER:

- max. 6.3 mm for steel cable
- between 8 and 12 mm for textile rope

WORK LOAD:

Permissible work load:

10 kN

CABLE DIAMETER:


- between 6.3 mm and 8 mm for steel cable
- between 10,5
 and 14 mm for textile rope

WORK LOAD:

Permissible work load:


• 20 kN



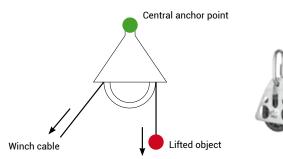


PL 101

Basic pulley of 90 mm in diameter attached at anchor point on the tripod head. Made of galvanized steel and polyamide. Connected to anchor point by means of connector AZ 090. Pulley is a component of winches RUP 502, RUP 502-B, RUP 502-BT, RUP 502-T, RUP 503-B, RUP 503-BT.

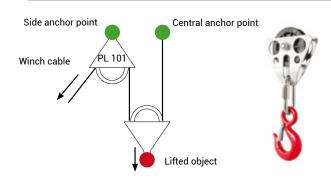

TU 415

Pulley TU 415 with steel hook is used for lifting and lowering loads with weight of up to 1000 kg. It can be used both with steel cables (of up to 6.3 mm in diameter) and textile ropes (of diameters between 8 and 12 mm). The mechanism ratio 2:1 enables reduction of the force required to lift a given load, thus allowing for lifting of as much as twice the load using a given winch. The product can be used with all winches and Protekt tripods. When used with tripods and winches with admissible load of 500 kg (TM 9 series) it is possible to increase the load capacity of the whole combination up to 1000 kg.

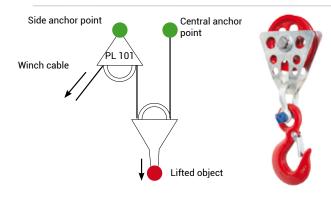

TU 416

Pulley TU 416 with steel hook is used for lifting and lowering loads with weight of up to 2000 kg. It can be used both with steel cables (between 6.3 and 8.0 mm in diameter) and textile ropes (of diameters between 10,5 and 14 mm). The mechanism ratio 2:1 enables reduction of the force required to lift a given load, thus allowing for lifting of as much as twice the load using a given winch. The product can be used with all winches and Protekt tripods. When used with tripods and winches with admissible load of 1000 kg (TM 6-T, TM 11-T, TM 13-T, TM 12-2) it is possible to increase the load capacity of the whole combination up to 2000 kg.

	PL 101	TU 415	TU 416
Material:	Polyamide, galvanized stee	Polyamide, galvanized steel	Cast iron, galvanized steel
Weight:	0,45 kg	1,14 kg	2,54 kg
Pulley wheel diameter:	90 mm	90 mm	110 mm
Dimensions:	133x56x128 mm	300x130x56 mm	330x130x56 mm
Static strength:	15 kN	10 kN	20 kN
Breaking strength:	30 kN	50 kN	60 kN
Admissible weight load:	1000 kg	1000 kg	2000 kg

VINCA products

- Bridges crane and gantry cranes
- Jib cranes
- · Hoists and winches
- · Scissor Tables and scissor lifts
- Elevators/Lifts for loads (PLT)
- · Dock levelers
- Moving Dock levelers (RMC)
- Coats Furniture
- Wheel-lok (Vehicle Immobilizer)
- · Safety equipment for docks
- Vacuum lifters VACU-LIFT
- Industrial Manipulators
- Pallet Inverters /Tippers
- Levelers NIVELMATIC
- · Tilters inclinator
- Skips
- · Industrial fans
- Industrial flexible doors, high speed doors
- · Cold storage doors
- Fire doors
- Safety gates DOK-GUARDIAN
- Festoon for mobile equipment
- Lifting appliances
- Industrial Radio Controls
- After Sales Service for above equipment































BARCELONA

Tel 93 635 61 20 Fax 93 635 61 30 info@vinca.es **MADRID**

Tel: (+34) 616 91 69 82 madrid@vinca.es C/ Técnica, 39
Pol. Ind. Torre Bovera
08740 Sant Andreu de la Barca
BARCELONA

www.vinca.es

VALENCIA

Tel: (+34) 647 817 537 valencia@vinca.es



GALICIA

Tel: (+34) 648 923 832 galicia@vinca.es