



VINCA

EQUIPOS INDUSTRIALES



Industrial manipulators

Powered Vacuum Lifters VACU-LIFT

Small Powered Vacuum Lifters for horizontal transports



VACU-LIFT offers you a wide variety of standard systems for the gentle transport of your loads, also for sensitive products.

A tried and tested technique with outstanding durability.

- standard and individual solutions
- long-life, high-quality systems and components
- flexible retrofittable devices
- flexible configurations for different loads and sensitive surfaces
- lifting capacities up to 1,250 kg with one basic unit



Powered Vacuum Lifters VACU-LIFT



Easy solutions for heavy loads

If you want to transport steel, stone, wood or plastic... whether the surface is smooth, rough or porous... VACU-LIFT can handle it with our standard systems for the gentle transport of your loads.

We are the guarantor for sophisticated vacuum transport systems with longlife durability and convenience in use and functionality for more than 40 years.

Among the standard vacuum lifters for horizontal transports we develop, design and deliver pivoting and mobile systems and of course systems for special needs.

In addition to the range of the powered devices we have our invention - energy independent vacuum lifters - with a lifting capacity up to 4,000 kg available.

These devices can be used for non porous loads.

Basic unit A

This part of the basic unit is a compact component and is used for the vacuum generation and control.

Mode of operation for "suction-release": lever valve (standard)

- **Power connection:**
 - 5-pole CEE-connection 400 Volt
 - 2-pole Schuko-plug at approx. 1 m cable besides the crane hook suspension
- **Lacquering:** devices primed and lacquered yellow (RAL 1007 – standard colour for hoisting devices). All other parts in standard colours or galvanized.
- **Crane hook suspension:** dimensions 60 x 120 mm

Basic unit B

This unit is the suction pad unit and can consist of a single suction pad or a beam construction with multiple suction pads.

- **Main beam:** solid, durable steel
- **Cross beams:** infinitely adjustable and lockable
- **Suction pads:** infinitely adjustable and lockable
- **Suction pads suspension:** standard
- **Height compensation:** aligned

We have illustrated standard configuration designs.
Customised or load specific variations are of course available up to 50,000 kg.

Further advantages

- easy control by hand lever, cable remote control, mounted operating panel, radio controlled or automatic mode on demand
- low maintenance and easy to service
- available standard voltages 24, 230, 400 or 500 Volt
- increased safety with opticalacoustical safety unit accordingly DIN EN 13155
- also safe in case of power failure
- for indoor and outdoor use
- made in Germany

Construction	Type	Lifting capacity	Maximum size of the load*	Dead weight	Suction pads Quantity / Size	Dimensions (l x w x h)	Connected load
	H-E-150	150 kg	2,000 x 1,000 mm, ab 2 mm	48 kg	1 / ø 270 mm	480 x 350 x 540 mm	230 V 50 Hz 0,3 kW
	H-E-300	300 kg			1 / ø 360 mm	480 x 400 x 540 mm	
	H-E-500	500 kg	2,000 x 2,000 mm, ab 2 mm	56 kg	1 / ø 495 mm	500 x 500 x 540 mm	
	H-E-750	750 kg		68 kg	1 / ø 650 mm	650 x 650 x 560 mm	
	H-2-150	150 kg	3,000 x 1,500 mm, ab 2 mm	75 kg	2 / ø 170 mm	1,500 x 350 x 640 mm	230 V 50 Hz 0,3 kW
	H-2-300	300 kg		90 kg	2 / ø 315 mm		
	H-2-500	500 kg		95 kg	2 / ø 340 mm	1,500 x 350 x 660 mm	
	H-2-750	750 kg		120 kg	2 / ø 495 mm	1,500 x 500 x 670 mm	400 V 50 Hz 0,6 kW
	H-2-1000	1,000 kg		130 kg			
	H-2-1250	1,250 kg		160 kg	2 / ø 650 mm		
	H-4Q-150	150 kg	2,500 x 1,250 mm, ab 2 mm	100 kg	4 / ø 180 mm	1,800 x 800 x 730 mm	230 V 50 Hz 0,3 kW
	H-4Q-300	300 kg		110 kg	4 / ø 270 mm		
	H-4Q-500	500 kg		130 kg	4 / ø 270 mm	1,800 x 800 x 750 mm	
	H-4Q-750	750 kg		140 kg	4 / ø 315 mm	1,800 x 800 x 770 mm	400 V 50 Hz 0,6 kW
	H-4Q-1000	1,000 kg		155 kg	4 / ø 340 mm	1,800 x 800 x 790 mm	
	H-4Q-1250	1,250 kg		170 kg	4 / ø 495 mm	1,800 x 1,000 x 830 mm	
	H-4K-300	300 kg	4,000 x 2,000 mm, ab 2 mm	170 kg	4 / ø 375 mm	2,850 x 380 x 750 mm	400 V 50 Hz 0,6 kW
	H-4K-500	500 kg		175 kg		2,850 x 380 x 760 mm	
	H-4K-750	750 kg		190 kg		2,850 x 380 x 790 mm	
	H-4K-1000	1,000 kg		195 kg		2,850 x 380 x 800 mm	
	H-4K-1250	1,250 kg		215 kg	4 / ø 495 mm	2,850 x 500 x 820 mm	
	H-6Q-150	150 kg	3,000 x 1,500 mm, ab 2 mm	88 kg	6 / ø 130 mm	2,200 x 1,000 x 720 mm	230 V 50 Hz 0,3 kW
	H-6Q-300	300 kg		90 kg	6 / ø 170 mm		
	H-6Q-500	500 kg		95 kg	6 / ø 210 mm	2,200 x 1,000 x 730 mm	400 V 50 Hz 0,6 kW
	H-6Q-750	750 kg		175 kg	6 / ø 270 mm	2,200 x 1,000 x 840 mm	
	H-6Q-1000	1,000 kg		180 kg	6 / ø 315 mm		
	H-6Q-1250	1,250 kg		195 kg	6 / ø 340 mm	2,200 x 1,000 x 890 mm	
	H-8Q-150	150 kg	4,000 x 2,000 mm, ab 1 mm	90 kg	8 / ø 130 mm	3,200 x 1,400 x 730 mm	230 V 50 Hz 0,3 kW
	H-8Q-300	300 kg		95 kg			
	H-8Q-500	500 kg		115 kg	8 / ø 210 mm	3,200 x 1,400 x 770 mm	400 V 50 Hz 0,6 kW
	H-8Q-750	750 kg		120 kg		3,200 x 1,400 x 860 mm	
	H-8Q-1000	1,000 kg		195 kg	8 / ø 270 mm		
	H-8Q-1250	1,250 kg		210 kg	8 / ø 315 mm	3,200 x 1,400 x 890 mm	

* It is important that there is no bending of the load during transportation.
The above maximum load sizes refer to steel sheet thickness of 1 or 2 mm.
A different thickness or material may alter the specifications.

Powered Vacuum Lifters VACU-LIFT



Application fields



More than 40 years ...

more than 20,000 devices worldwide

VACU-LIFT Transport Systems are designed for various branches of industry and multifunctional applications. Either as a standard or as a customised system.

Individual fields of application and the enormous versatility of our vacuum transport systems leave nothing to be desired. Our solutions are the essential component for the economical and failure free operation of many companies.

Service

One part of our services is the prompt delivery of all relevant components.

Furthermore, our team of experienced customer engineers and service technicians are also at your disposal.

Tel: (+34) 93 635 61 20 - info@vinca.es - www.vinca.es

Accessories



Small resting trestles



Cable remote control



Operating panel



Automatic control



Foldable beam



400 V - Switch box



Safety webbing (pair)



Chain suspension



Weld-on hooks




Quick-change set small

We will always have and take time for our customers.


We hope this brochure has provided you with a first impression and an interesting overview about the VACU-LIFT standard powered systems for the gentle transport of your loads, also for sensitive products.

If you would like to learn more about our products give us a call.

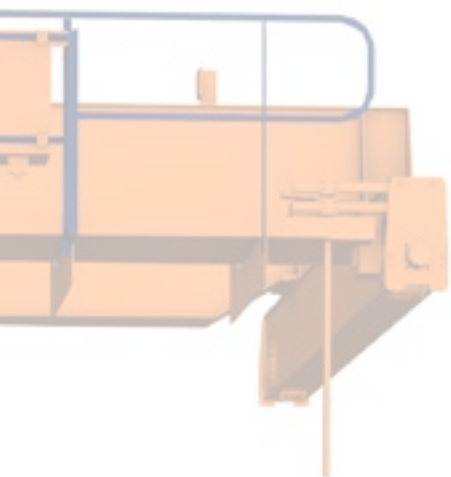

VINCA

EQUIPOS INDUSTRIALES

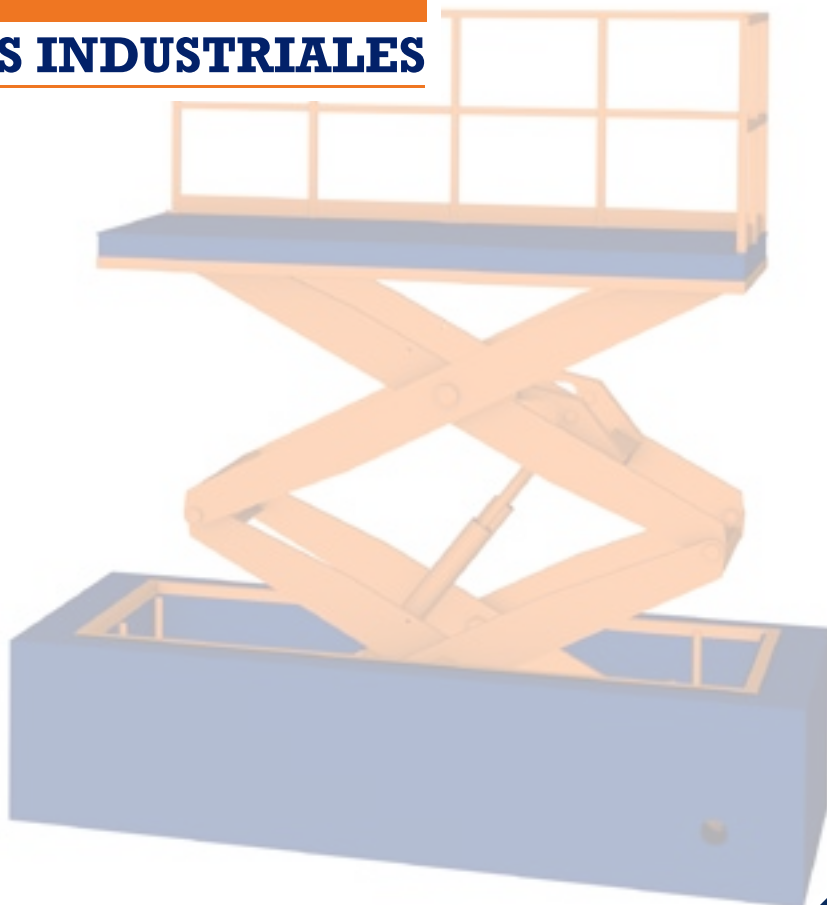

VINCA products

- Bridges crane and gantry cranes
- Jib cranes
- Hoists and winches
- Scissor Tables and scissor lifts
- Elevators/Lifts for loads (PLT)
- Dock levelers
- Moving Dock levelers (RMC)
- Coats Furniture
- Wheel-lok (Vehicle Immobilizer)
- Safety equipment for docks
- Vacuum lifters VACU-LIFT
- Industrial Manipulators
- Pallet Inverters /Tippers
- Levelers NIVELMATIC
- Tilters inclinators
- Skips
- Industrial fans
- Industrial flexible doors, high speed doors
- Cold storage doors
- Fire doors
- Safety gates DOK-GUARDIAN
- Festoon for mobile equipment
- Lifting appliances
- Industrial Radio Controls
- After Sales Service for above equipment

Ⓔ ATEX classified equipment as option.



Official distributor of:



VINCA

EQUIPOS INDUSTRIALES

C/ Técnica, 39
Pol. Ind. Torre Bovera
08740 St. Andreu de la Barca
BARCELONA
www.vinca.es



BARCELONA

Tel 93 635 61 20
Fax 93 635 61 30
info@vinca.es

MADRID

Tel: (+34) 616 91 69 82
madrid@vinca.es

VALENCIA

Tel: (+34) 647 817 537
valencia@vinca.es

GALICIA

Tel: (+34) 648 923 832
galicia@vinca.es